When the Container Is the Benchmark: A Bit-Exact Native Reimplementation of the ABIDES Market Simulator and What Whole-Container Timing Rewards

Technical report — Agenthon 2026, Track 3 (Accelerated Market Simulation)

Team: S2WISH (team 36) · **Version:** 1.4 · **Status of results:** Development phase complete; the Final has run, its verification and publication are pending

Author: Shashwat Srivastava (ORCID 0009-0000-0033-5570) · **Affiliation:** Independent Researcher

---

Abstract

Agenthon 2026 Track 3 asks participants to make the ABIDES agent-based market simulator faster while reproducing its outputs exactly: the order-event trace and the message ledger of every scenario must equal the reference. We built a C++ engine that reproduces ABIDES event for event and numpy's legacy random streams draw for draw, and verified it on the 65 public scenarios, 30 batch sub-scenarios and 1,318 stored differential-fuzz cases with recorded reference hashes.

Partway through the Development phase the organizers changed the ranked quantity from a self-reported simulation-loop rate to **verified events divided by whole-container time measured by their harness**, averaged over units. This report documents how that change relocated the optimisation problem. Under the old rule our engine reported 8.34 million events/s; under the new one the same engine, packaged the same way, scored 153,825 — and profiling showed the event loop was 7–15% of each unit's process time while Parquet encoding through Apache Arrow was 50–63%. Replacing Arrow with a purpose-built Parquet writer of about 300 lines, a built-in SHA-256 and a static launcher cut total process time over the 65 public units from 10.20 s to 3.41 s on our machine and raised the score to 181,496. Later single uploads scored 184,858 (a 2.2 MB single-layer image with smaller files), 188,687 (leaving out an output the scorer does not read on six heavy units) and 189,018 (a profile-guided build); each of these steps is a few percent from one upload per side. Building the trace in its final order during the run, which removes three passes over the data after it, scored **203,394** (+7.6%, one upload per side), our best Development score: rank 10 of 50 teams, when the first three stood at 231,024, 222,058 and 221,088. Several other uploads, the last Development upload among them, scored below the best at the time.

For the Final we uploaded sub16's engine with two defects fixed that no Development score had exercised (a crash of the last-resort path on the read-only root, and a hand-over decision that could depend on thread timing), in the full image with the exact Python fallback rather than the scratch image that had scored best. That choice was a risk decision: correctness on the sealed scenarios is all or nothing, and a scratch image fails any input its launcher declines; what the full image costs on the host was never measured. Upload 993712 scored **1,755,232.6496** on the Final metric, and its run summary listed no problems. The rank is unknown until the organizers publish the Final results. The figure is not comparable

with any Development score: the Final times each unit from container start to finish, which leaves out about 0.46 s per unit that Development counted.

The main finding is about measurement, and it is not flattering. Our laptop timings were a poor guide to host scores, in size and at times apparently in sign. A two-parameter cost model fitted to our first two scores was refuted by the leader's score, and no model of the form "fixed cost plus a multiple of laptop process time" can even rank our own builds. We then treated uploads that change one setting as experiments, on the organizers' statement that Development runs on a single dedicated machine and another team's report of 0.1% repeatability. A third team later reported identical images scoring up to 14% apart on the same board. Our comparisons of single uploads that differ by a few percent (among them the latency helper thread, 203,394 with it against 185,818 without on one binary, and a bundled build 3.6% below its predecessor) are therefore not established; we keep their numbers and say so where they appear. They did show that two conclusions we had announced from earlier scores ("writer threads lose", "threads lose") were not supported. We report what was measured, what was only modelled, the hypotheses that were refuted (including our own score predictions), the experiments that failed, and the limits of a study whose timing rig was a memory-starved laptop. Everything needed to reproduce the correctness results is included.

Keywords: discrete-event simulation; limit order book; ABIDES; bit-exact reproduction; benchmark design; container start-up latency; Parquet; differential fuzzing

---

1. Summary of findings

#	Finding	Evidence	Status
1	A native engine can reproduce ABIDES exactly, including numpy `RandomState` streams	Byte-identical trace and ledger on 65 scenarios and 30 batch sub-scenarios; 1,318 of 1,318 fuzz cases reproduce the recorded reference hashes	Measured
2	Under whole-container timing the simulator stops being the bottleneck	Event loop 7–15% of process time; Parquet encoding 50–63% (10 units, best of 5)	Measured
3	A purpose-built Parquet writer is worth more than the engine	Process time 10.20 s → 3.41 s over 65 units; score 153,825 → 181,496 (+18%)	Process time measured; the score step is one upload per side
4	Image shape (773 MB Python-based vs 2.2 MB scratch) and output size on the scoring host	181,496 → 184,858 (+1.9%), one bundled pair that also changed the output encoding and the binary	**Not established** (one upload per side, within the reported noise); the full image's host cost was never measured
5	The fixed container cost is at most 0.47 s per unit, if it is the same on every unit. Our earlier fit of 0.55 s was wrong	7,728,572 events over 71 units and the leader's 231,024; for the organizers' higher calibration figure, see §5.12	Arithmetic bound

#	Finding	Evidence	Status
6	On the laptop, memory handling dominates what remains	Laptop: kernel time ≈ user time, 367K → 125K page faults, −23% process time. Host: 184,858 → 183,420 (−0.8%)	Laptop measured; the host effect is **not established** (one upload per side, within the reported noise)
7	The scorer does not read the ledger on units whose card says none is required	Six single units' cards; the scorer's source and README. Not producing it scored 183,420 → 188,687 (+2.9%)	Rule confirmed from the scorer; the score gain is **not established** (one upload per side)
8	Laptop timing is a poor proxy for the scoring host	Fresh containers are 2–5× slower on the laptop with a spread as large as the mean; laptop and host steps differ widely in size, and in four of nine steps in sign (§5.9, §5.10)	Laptop measured; the host side of most steps is one upload per side within the reported noise
9	A build that bundled five changes scored 2.6% lower and the cause could not be isolated	sub11 189,018 → sub13 184,047	**Not established** (one upload per side, within the reported noise); unexplained
10	A cautious launcher can be silently slow	It declined 73% of fuzz inputs for a formatting reason; 1.7% after the fix	Measured
11	A validation that only reports pass or fail can hide a lost code path	A later build still passed 1,318 of 1,318 fuzz cases, but 29 of them had moved to the reference path	Measured
12	Building the trace in its final order during the run gave the largest score step since the writer	sub11 189,018 → sub16 203,394 (+7.6%); the laptop had suggested 4–7% less process time	Observed, one upload per side; sub16 also carries two smaller changes (§5.8)
13	The latency helper thread on the host	The sub16 binary scored 203,394 with it and 185,818 with one environment variable switching it off (9.5% apart); sub18's engine scored 193,962 without a helper and 199,058 with sub16's helper code (sub19a, 2.6%)	**Not established** (one upload per side, within the reported noise)
14	Bundling an unmeasured change with a measured one leaves a score unexplainable	sub17 = sub16 + a branch-free heap step (measured: 56–57% fewer branch misses on the largest unit) + a changed helper start-up (not measured): 196,165, 3.6% below sub16	The score difference is **not established** (one upload per side); no cause can be assigned
15	Writer threads during the run: the loss we announced was not supported	Same sub17 binary: 196,165 without, 199,285 with (+1.6%); on sub16's binary, the last Development upload with them on scored below sub16	**Not established** either way (one upload per side, within the reported noise)
16	No cost model built on laptop time ranks our own builds	Best fit of "fixed cost + k × laptop process time": rms residual 3.2%, largest 6.3%; three score projections from it all missed	Modelled, then refuted by scores (each a single upload)
17	Hardware counters repeat where wall-clock time does not	Instructions to ±0.00%, branch misses to under 0.5%, cycles to 0.5–2%; laptop process-time ratios for the same pair of builds were −14% in one session and −3% in another	Measured

#	Finding	Evidence	Status
18	Development single-upload comparisons were noisier than we assumed	Another team reported identical images scoring up to 14% apart on the Development board (203.0K and 219.4K; 230.9K and 202K); the organizers could not tell drift from noise in two timings of their own	Reported by others; not checked by a repeated upload of ours (§4.2). It is why rows 4, 6, 7, 9 and 13–15 are not established
19	The Final image, sub16's engine with two defects fixed in the full image with the Python fallback, finished with no problems listed	Upload 993712: 1,755,232.6496 on the Final metric; the run summary listed no problem kinds	Scored by the organizers (§5.12); the summary is not a unit-by-unit result; rank unknown until publication; not comparable with Development scores

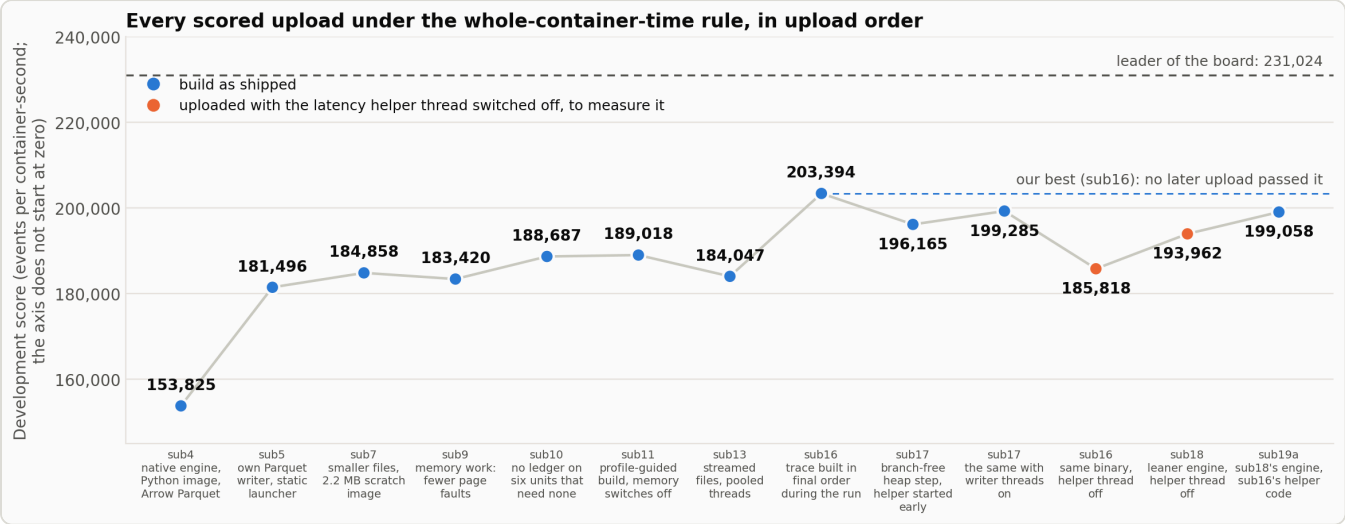


Figure 1. Development scores of every scored upload under the whole-container rule, in upload order, from sub4 to sub19a (a second upload of the sub4 image is left out). Blue: a build as shipped; orange: the two uploads made with the latency helper thread switched off in order to measure it. The vertical axis does not start at zero. sub16 (203,394) remains our best Development score: the five uploads after it, sub19a (199,058) included, scored below it; they are compared in Figure 16. The last Development upload (sub16 with writer threads on) also scored below sub16; its exact score was not recorded, so it is not drawn. Each score is a single run per unit. Two uploads of the same sub4 image differed by 1.6%; the organizers later stated that the Development host is a single dedicated machine, one team reported repeatability of 0.1%, and another reported identical images up to 14% apart (§4.2). The Final score is on a different scale and is not drawn (§5.12).

2. The task

2.1 What must be reproduced

ABIDES (Agent-Based Interactive Discrete Event Simulation, `jpmorganchase/abides-jpmc-public`, commit `f9cbe513`) simulates a limit-order-book exchange and a population of trading agents exchanging timestamped messages through a kernel. A scenario fixes the seed, the horizon, the agent population (noise, value, momentum and market-maker agents), an oracle (a mean-reverting fundamental with jump

"megashocks"), a latency model (deterministic, uniform, log-normal or Pareto) and exchange options (self-trade prevention, acknowledgement and computation delays).

A submission is a Docker image exposing two commands:

- `simulate --config scenario.json --out trace.parquet` writes three files: the trace (7 columns: time, agent, event type, side, price, size, order id), the message ledger (10 columns, three of them nullable) and `events.json` (counts, hashes, timing). On units whose card declares that no ledger is required, the ledger may be left out (§5.9);
- `simulate-batch --batch-dir … --out-dir …` does the same for several markets and writes an aggregate.

Correctness is gated before speed counts. The gates relevant here: the trace must match the reference's fills and ordering; the ledger, where required, must be consistent with it; the event count must equal the reference's exactly on every unit; the hash declared in `events.json` must be the hash of the file written.

2.2 What is ranked — and how it changed

	Before the scoring change	**Since the scoring change (Development)**	**Final (§5.12)**
Numerator	events	verified events (Parquet row count)	verified events
Denominator	simulation-loop time **reported by the submission**	container time **measured by the harness**, from creating the container to removing it	Docker `StartedAt` → `FinishedAt`
Runs per unit	1	1; a single machine that takes only Track 3 runs, one submission at a time, its units one after another (organizers' statement)	5, first discarded, median; at most 300 s per run and 24 hours for the whole run
Aggregation	mean, each unit capped at 10^7	arithmetic mean of per-unit rates	arithmetic mean of per-unit rates
Environment	—	`--cpus=4` quota, 16 GiB, no network, read-only root, uid 65534, 64 MiB noexec `/tmp`, 256 PIDs, a GPU attached to every unit	same quota; the same machine as Development (organizers' statement)

Two properties of the new rule drive everything that follows.

1. **A mean of rates is dominated by the units with the most events.** The 71 public units (65 single scenarios and 6 batch units) contain 7,728,572 trace events; the 8 largest hold 53.5% of them (Figure 2). The 65 single scenarios alone contain 7,465,846.
2. **Every unit's denominator contains a fixed container cost** that the participant does not control.

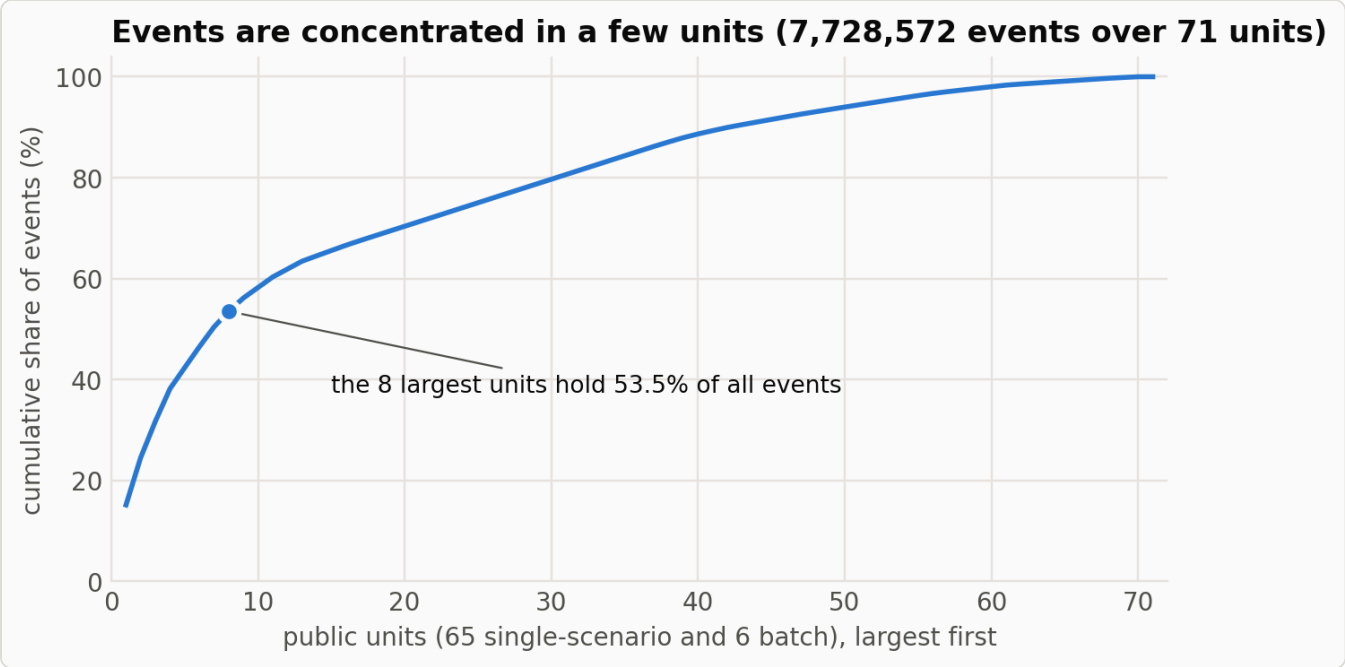


Figure 2. Concentration of events across the 71 public units of the Development roster (65 single-scenario units and 6 batch units; 7,728,572 events).

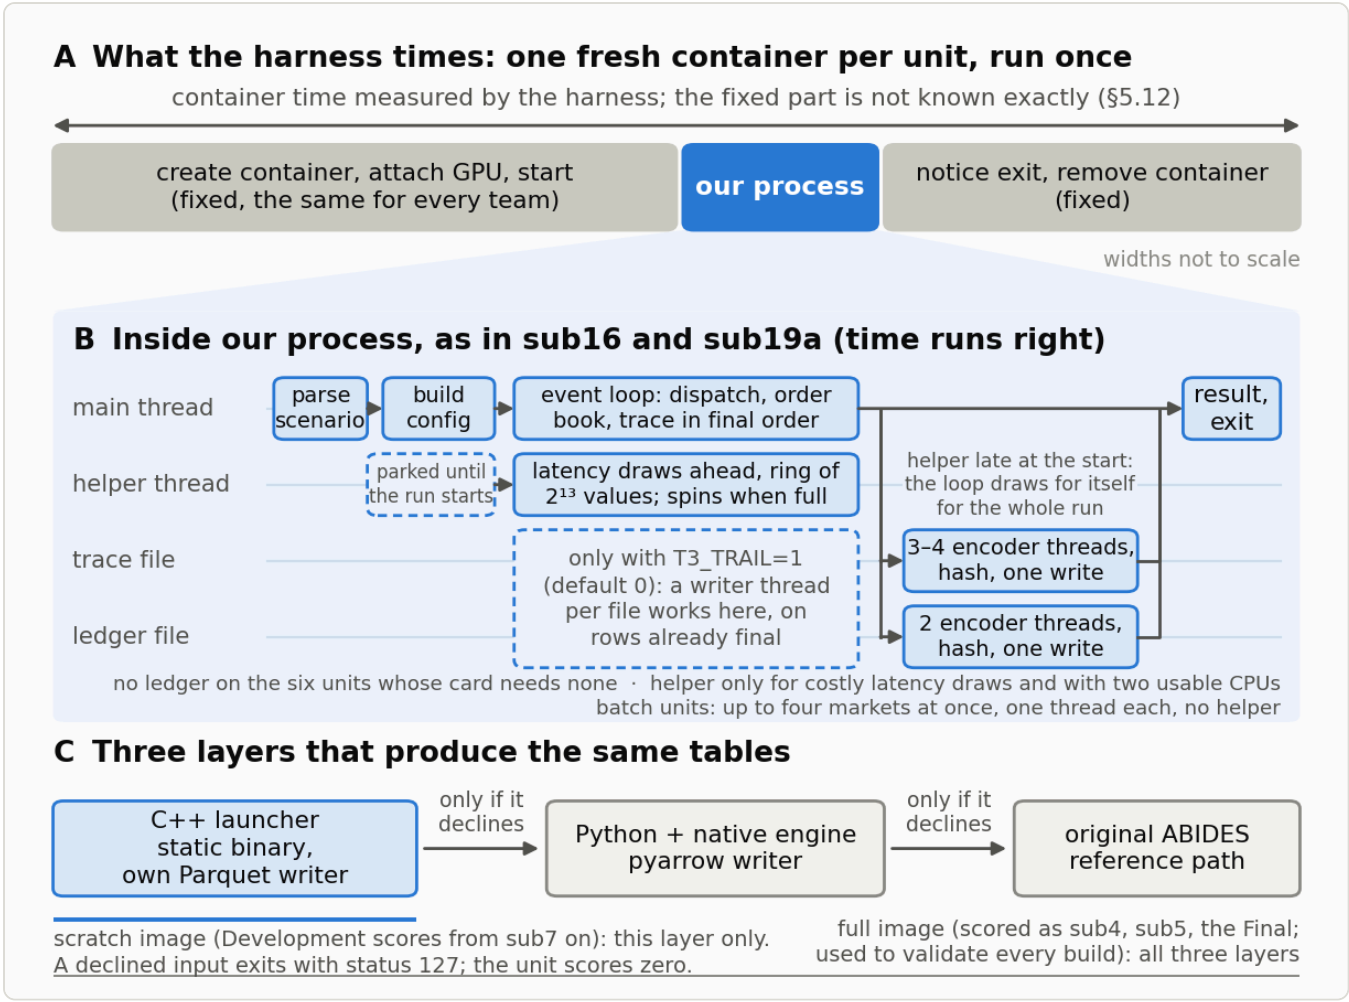


Figure 3. (A) What the Development harness times; widths are schematic, and for a median unit our process is a small part of the measured time. (B) What the launcher does inside that window, as shipped in sub16 and restored in sub19a. The event loop puts the trace rows in their final order as it runs. A helper thread, created with the engine and parked until the event loop wakes it at the start of the run, draws latencies ahead of the loop into a ring of 2^{13} values and spins while the ring is full; if it has not overtaken the loop within the first ring of draws, the loop draws for itself for the whole run. The helper exists only for latency models with a costly draw and when two CPUs are usable; batch units run up to four markets at once without it. Output is encoded after the event loop by default (three or four encoder threads for the trace, two for the ledger, one write per file); from sub15 a switch (`T3_TRAIL=1`) instead gives each file a writer thread that works during the loop, a mode scored twice (sub17 with writer threads on, and sub16t, the last Development upload; §5.10). sub17 and sub18 changed the helper's start-up and waiting (§5.8) and are not what is drawn. (C) The three layers of the submission, each used only if the one before declines the input. The scratch image holds the first layer only: there a declined input exits with status 127 and the unit scores zero.

3. System

3.1 Three exact layers

Layer	Used when	Output files
C++ launcher (`launcher.cpp` , static binary)	The scenario uses plain JSON types inside a certified numeric domain	Valid Parquet with identical tables (sub5 onward); pyarrow's exact bytes in sub4
Python + native engine (`t3native` , ctypes → `libt3engine.so`)	The launcher declines	pyarrow's exact bytes
Original ABIDES (`abides_fork`)	The engine declines or raises	reference bytes

Anything a faster layer is not certain about is handed to a slower one. The launcher declines, among other cases: values outside ranges where integer and floating-point arithmetic were proven exact; an empty trace; more than 60,000 agents; a log-normal latency draw that could round differently under a different `log` implementation (§7.3); and, from sub18, a size or order id that does not fit the 32-bit fields of the compact trace row.

3.2 The engine

`engine.cpp` (1,503 lines in sub4; 1,662 in sub16) reimplements the kernel, the exchange and order book, the four agent types, the oracle, the latency model, the ledger and the trace row ordering. `np_random.hpp` reproduces numpy 1.26 `RandomState` (MT19937, legacy polar Gaussian, exponential, masked-rejection integers, log-normal, Pareto); it was checked on a 478-million-draw comparison matrix.

Design points that mattered for exactness:

- the kernel's dispatch order key `(deliver_at, sender, recipient, message_id)` is preserved exactly; faster data structures were accepted only when they produce the same minimum;
- every agent owns its random stream; the latency stream depends only on the draw index, which is what allows a helper thread to produce it ahead of the main loop;
- `-ffp-contract=off` everywhere: fused multiply-add would change results;
- Python's `round()` (ties to even) and `int()` (truncation) are reproduced, the latter also for whole numbers written as floats (§6.4);
- from sub14 the trace is kept in its final order while the run proceeds, which is valid because rows are logged at dispatch times that never decrease; when a negative latency breaks that, the trace is rebuilt by the reference's full rule at the end (§5.8). This is the change behind the best score (§5.10);
- every later engine change (the branch-free heap step of sub17; the compact trace row, wakeup rings and sorted blocked queues of sub18, §5.8) was accepted only after its binary produced the same bytes as the sub16 binary on the 65 single units, with the helper thread on and off (§4.1).

3.3 The output path

sub1–sub4 wrote Parquet through the same Arrow library pyarrow ships, with pyarrow's writer settings, which made the files byte-identical to the reference. From sub5 the launcher uses its own writer (`pq_fast.hpp`):

Aspect	Choice
File structure	Thrift compact footer written by hand; one V1 data page per column chunk; all columns OPTIONAL, as pyarrow writes them. Row groups of at most 2^{20} rows when the file is built after the run (sub5–sub11, and the default from sub16); 2^{16} in the streamed writer of sub12–sub14; 2^{12} when writer threads work during the run (sub15; a switch, `T3_TRAIL=1`, from sub16)
Integers	PLAIN in sub5; DELTA_BINARY_PACKED from sub6 (blocks of 128 deltas, 4 miniblocks)
Strings (`msg_type`, `side`)	One dictionary page; RLE_DICTIONARY indices as a single bit-packed run, 4 bits per value; written from integer codes
Nullable columns	Definition levels as a bit-packed run of width 1; only present values stored
Metadata	The same `pandas` JSON as the reference (this restores nullable `Int64` dtypes)
Hash	Built-in SHA-256 using the CPU's SHA instructions, portable fallback
Compression	None; the encodings do the work

The verifier reads the files with `pandas.read_parquet`, compares tables, and checks the declared hash against the file we wrote. It does not compare file bytes with the reference; we confirmed this by reading the public scorer and by passing the organizers' regression harness.

---

4. Method

4.1 Evidence loop

Every change was judged by output identity first and speed second. A change that could not be shown identical was not kept, whatever it gained.

Check	Size	Used for
Byte identity with the baseline image (SHA-256 of both files)	65 scenarios + 30 batch sub-scenarios	sub1–sub4 and the Python paths of every image
Table identity (column names and order, Arrow types, `pandas` metadata, values, nulls, pandas dtypes) + declared hash = file hash + row count	same	sub5 onward

Check	Size	Used for
Organizers' regression harness (upstream `bffb572`, toolkit v2.5.1)	65 scenarios	every submission
Repeat-run byte stability (3 runs)	65 scenarios	sub5 onward
Runtime-restriction runs (read-only root, uid 65534, no network, PID and tmpfs limits)	6 batch units + single runs	sub4 onward
Stored fuzz corpus replay against recorded reference hashes, with the count of cases each layer handled	1,318 cases	sub6 onward
Units that need no ledger, mounted as the harness mounts a unit: trace equal to the reference and to a run that writes the ledger	6 units	sub10 onward
Fuzz cases with a negative latency, run with no fallback reachable, against an earlier build	29 cases	sub15 onward
Byte identity of a candidate binary's files with those of the sub16 binary, helper thread on and off, before any image is built (`lab/cmp_bins.sh`)	65 scenarios	sub17 onward
Table identity against the sub16 binary when the writer mode differs (`lab/cmp_tables.py`)	71 units	sub17 onward
numpy-vs-C++ random-stream matrix	478 million draws	engine

4.2 Measurement

There were two instruments, and the report is largely the story of learning which one to believe.

The laptop. All local timing came from one Windows 11 laptop (Ryzen 5 5500U, 5.99 GB RAM, Docker Desktop on WSL2 with a VM of 2.76 GiB). It was frequently swapping. Consequences, and what we did about them:

- single runs varied by up to 10× (the same 127 MB write took 1.0 s and then 6.6 s);
- whole-process time was measured as the best of N runs per unit, with images interleaved and outputs on `/dev/shm`;
- from sub8 on we also record page-fault counts and peak memory, which do not depend on load;
- wall-clock differences below about 5% could not be resolved and are reported as unresolved;
- all of this timed warm, repeated runs inside one container. The scoring host runs each unit once in a fresh container, and the two later appeared to disagree wherever memory or threads were involved (§5.9). `lab/cold_runs.sh` times fresh containers, but on this machine their spread is as large as their mean;
- **until late in the work the inputs were read from a slow Windows-backed mount**, which adds 10–20 ms per run that the scoring host does not have. We found this only by tracing system calls on the smallest unit. The whole-process laptop figures taken from sub4 until then carry it (§5.11 lists the affected tables and figures). After that, process time is measured with the inputs copied to an in-memory mount (`lab/true_p.py`), and even then only ratios within one session are used;
- engine work is measured with hardware counters on one thread (`perf stat -e cycles:u,instructions:u,branch-misses:u` , helper thread and writer threads off). On a quiet machine

instructions repeat to ±0.00%, branch misses to under 0.5% and cycles to 0.5–2%. These are the only local numbers we now treat as measurements of a change (§5.11).

The scoring host. The platform returns one number per upload; it withholds program logs, and we did not obtain per-unit results. Two uploads of the sub4 image differed by 1.6%, which we took as the noise of a shared host. Later the organizers stated that Track 3 Development "runs on a single machine that takes only Track 3 runs, and it's the same machine the Final is timed on", and that it "runs one submission at a time, and that submission's units one after another". A participant from another team reported in the same thread that two of their runs agreed "to within 0.1%". Later, a third team (organizers' issue #37) reported identical images scoring up to 14% apart on the Development board (203.0K and 219.4K; 230.9K and 202K), and the organizers could not tell drift from noise in two timings of their own taken 26 minutes apart. We have not repeated an identical upload since and can confirm neither figure. Our comparisons of single uploads that differ by a few percent (the helper +9.5%, sub18's engine +4.4%, sub17 −3.6%, sub19a −2.1% and +2.6%, writer threads +1.6%, the last upload below sub16, and sub7, sub9, sub10, sub11 and sub13 in §5.5) are therefore **not established**: one upload per side, within the reported noise. The larger steps of +18% (sub5 over sub4) and +7.6% (sub16 over sub11) are kept as observed, also with one upload per side. Uploads are limited to 5 per day and 23 per person in total.

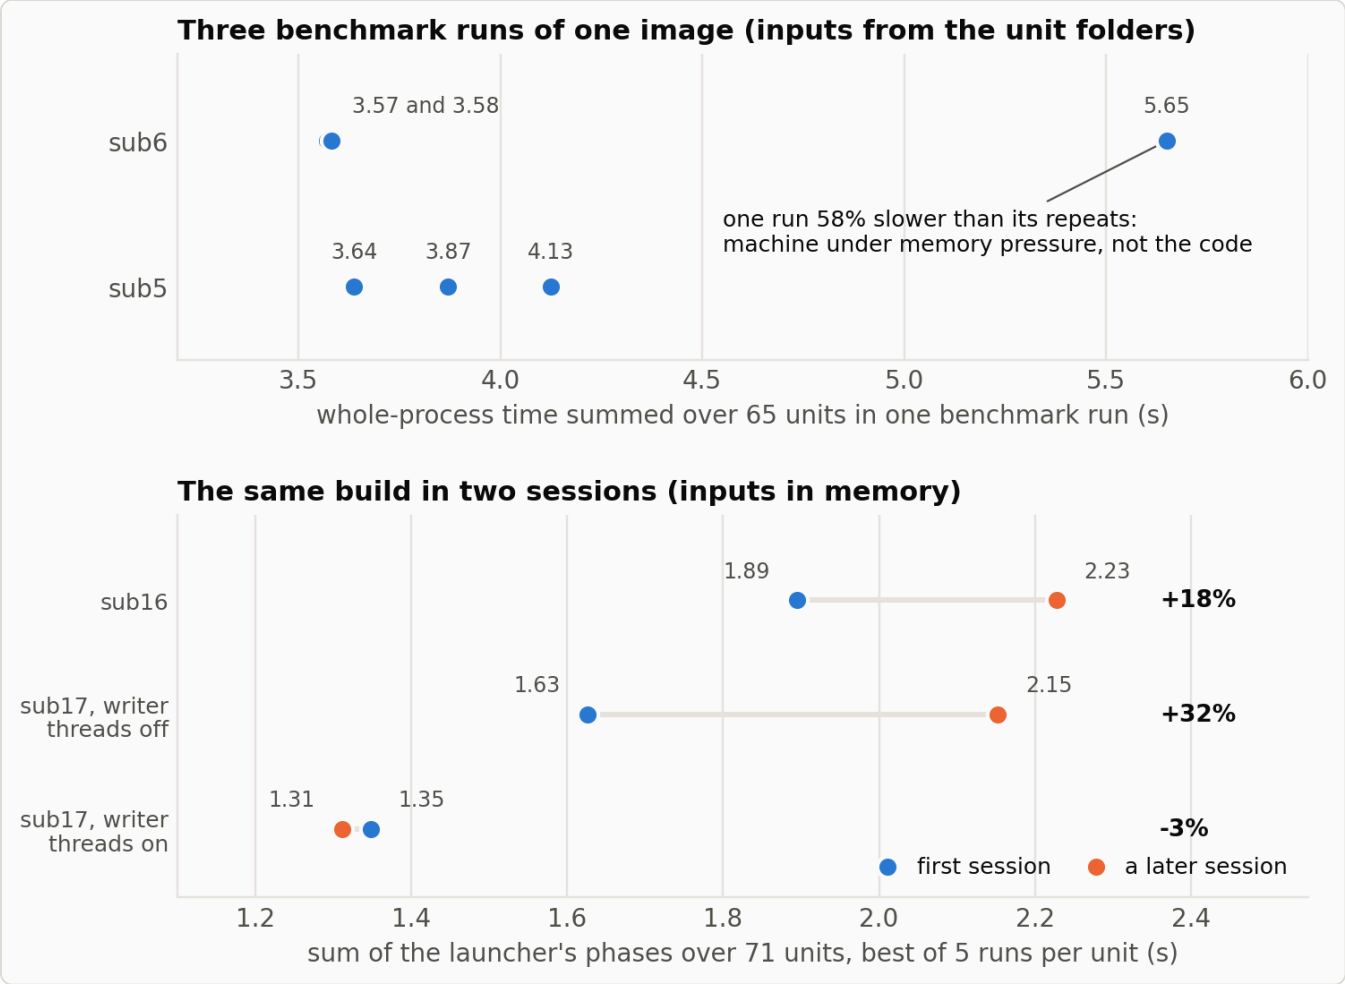


Figure 4. Top: why single benchmark runs were not trusted. One of three runs of the same image was 58% slower; on its own it suggested that sub6 was slower than sub5, and two repeats showed the opposite. Bottom: the later method (inputs in memory, all 71 units, best of 5 runs per unit) does not remove the problem between sessions. The same build measured in two sessions gave 1.89 s and 2.23 s for sub16 (+18%), 1.63 s and 2.15 s for sub17 with writer threads off (+32%), and 1.35 s and 1.31 s for sub17 with writer threads on (−3%). The two panels are different measurements and their seconds are not comparable.

4.3 Decision support

A typed decision-routing model (the decision model) was used at eight points to rank candidate next steps from a written state description. Its answers were recorded together with what we then did; it was not always followed and not always right (§5.12, §6.8, §8). Parallel research and review agents were used seven times: to check the rules (which revealed the scoring change), for a four-way study of the competition, container start-up costs, the literature and our own code (§6.5), for two read-only reviews (§6.7), and for three studies: a score model, a search for public code by other teams, and a review of the engine (§6.8).

---

5. Results

5.1 History under the old rule

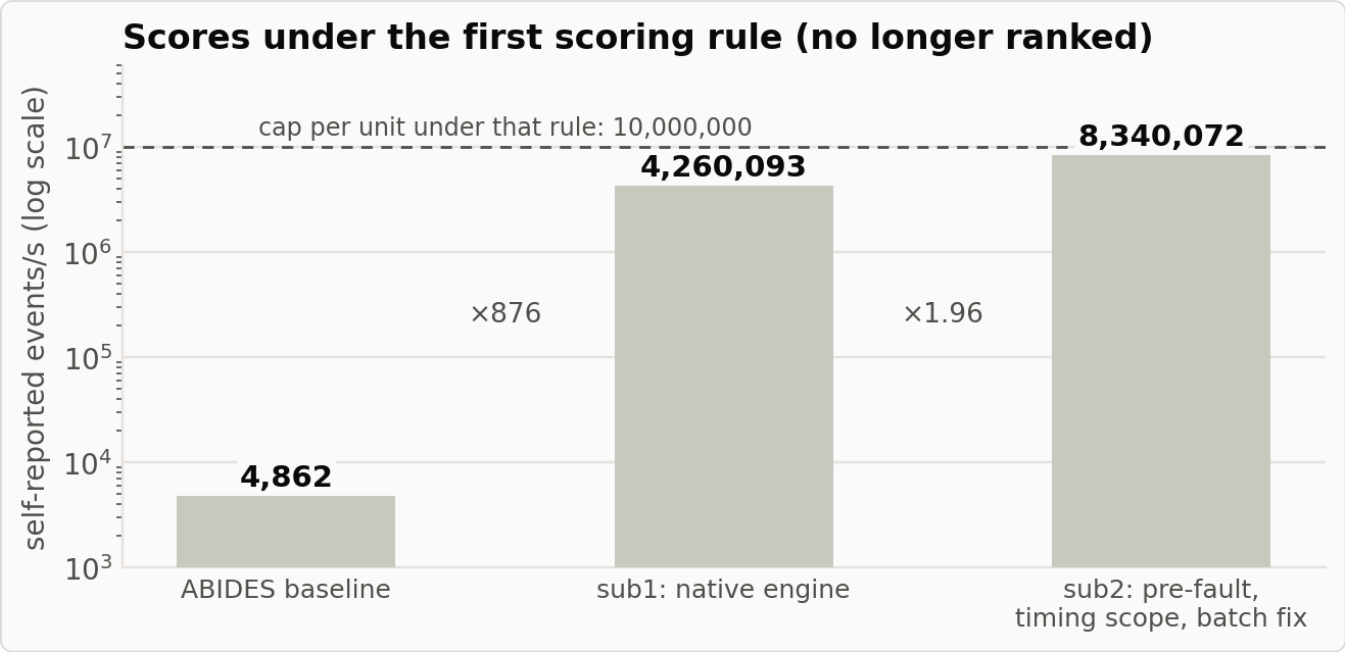


Figure 5. Scores while the board ranked self-reported simulation-loop rates, on a logarithmic axis; the figures between the bars are the ratios of one step to the next, and the dashed line is that rule's cap of 10,000,000 per unit. These runs are no longer ranked.

The step from sub1 to sub2 came from three findings: about a third of loop time was kernel page-fault handling for output buffers (fixed by pre-faulting); our timer covered work the reference's timer did not; and batch units were timing process-pool start-up.

5.2 Engine rewrite (sub4)

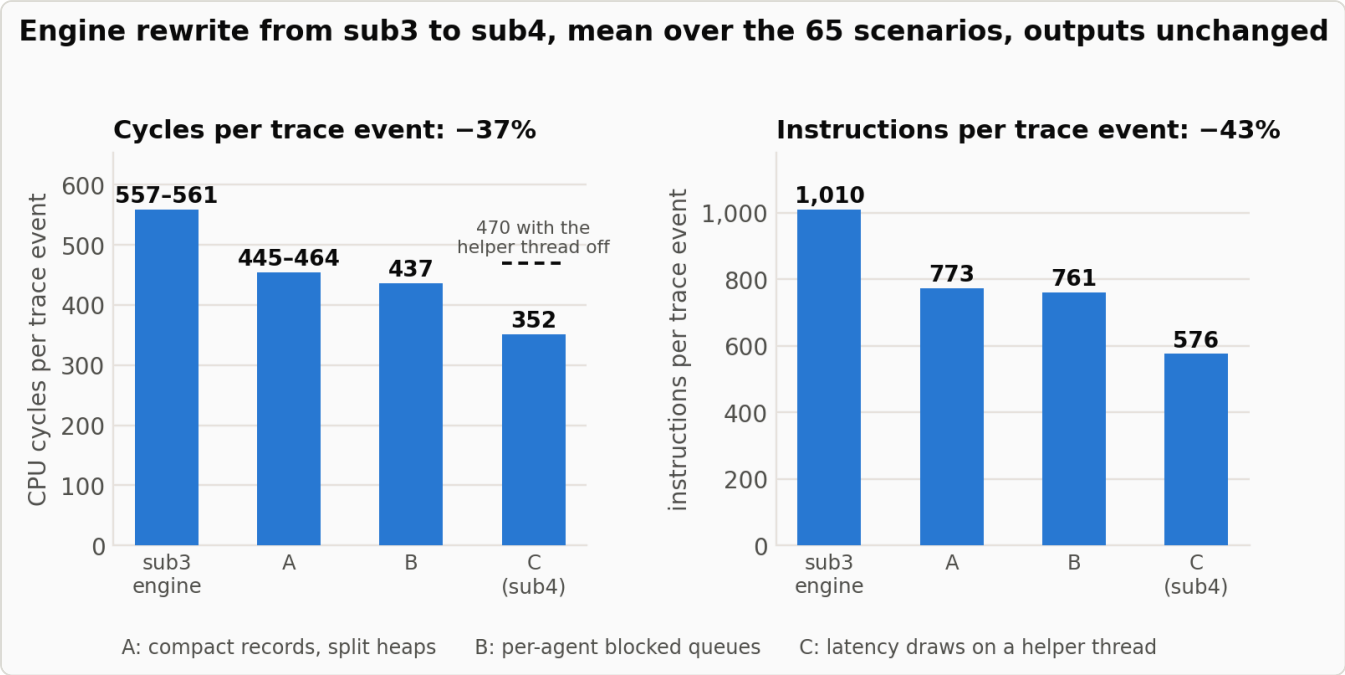


Figure 6. The engine rewrite from sub3 to sub4, mean over the 65 scenarios. Left: CPU cycles per trace event, 557–561 to 352 (−37%). Right: instructions per event, 1,010 to 576 (−43%). Step C moves the latency draws to a helper thread: with that thread switched off the same binary measured 470 cycles per event (dashed mark); its instruction count in that mode was not recorded. This figure covers only that rewrite; the engine changes of sub17 and sub18 are in Figure 17, measured differently (totals on one unit, not means per event).

Step	Change	Key observation behind it
A	56-byte messages, 40-byte ledger records, raw-cursor buffers, two 4-ary heaps, replace-top trick, inline rounding	Flat profile dominated by per-field bookkeeping
B	Per-agent blocked queues	In some scenarios 73% of loop iterations only re-queued a message for a busy agent
C	Latency draws produced by a helper thread with a wait-free hand-over	Random numbers and latency were about 45% of loop instructions

5.3 Where the time went once containers were timed

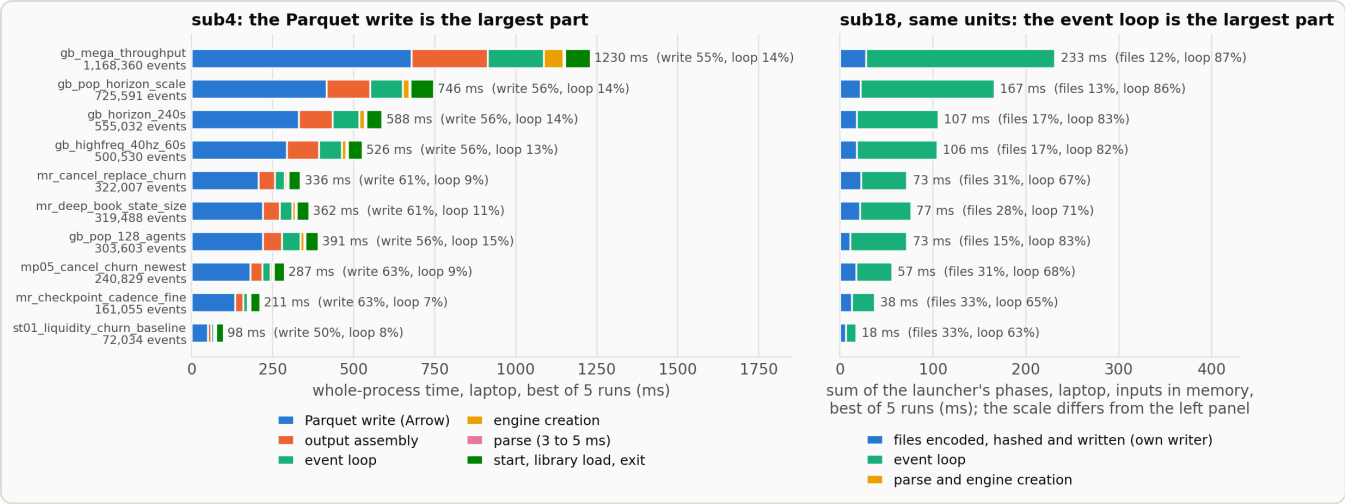


Figure 7. Left: whole-process time inside the sub4 image for ten large units (the eight largest and two smaller ones), best of 5 runs. The Parquet write through Arrow is the largest part of every bar, 50–63%; the event loop is 7–15%. Right: the same units in sub18, for contrast. This is a different measurement (sum of the launcher's phases, inputs in memory, helper thread on, writer threads off, one session; §5.11) on a different scale, so the two panels compare shares, not milliseconds. In sub18 the event loop is 63–87% of each bar and the files 12–33%. No such per-phase measurement was recorded for sub19a.

The left panel is the central observation of the study. We had spent the preceding days on its event-loop segment.

5.4 Replacing the writer (sub5) and shrinking the files (sub6)

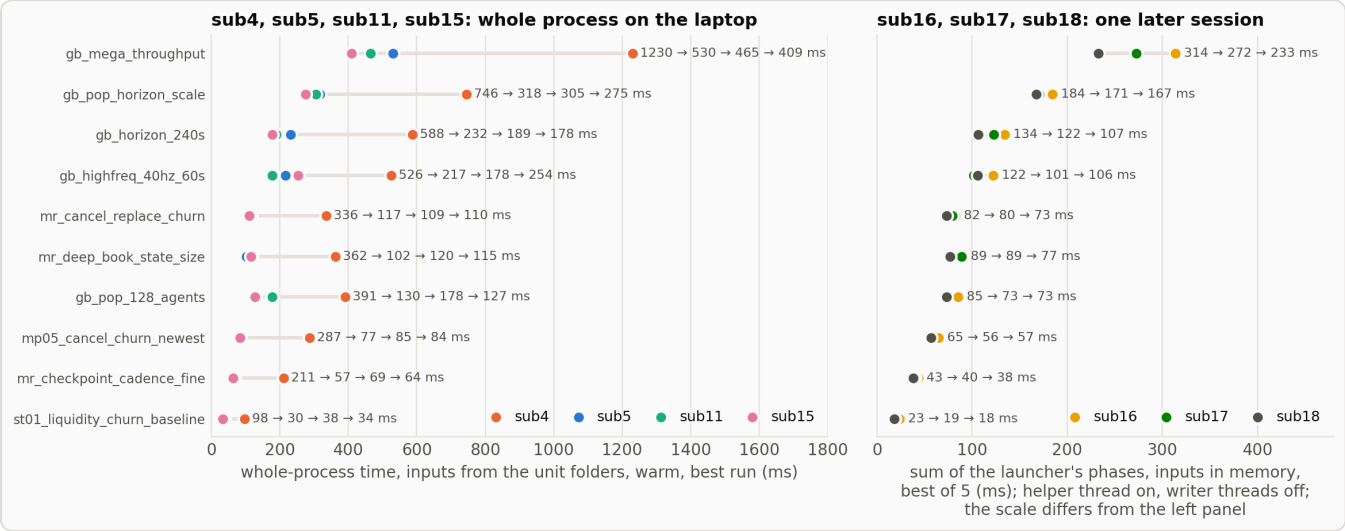


Figure 8. Whole-process time on the laptop for ten large units: sub4 (orange), sub5 (blue), sub11 (green), sub15 (pink). Warm runs, best per unit. sub4 and sub5 were measured with the ledger always written; sub11 and sub15 from the unit directories, in the memory mode they ship in. Differences between the last three are within that machine's run-to-run spread. All four series include the time of the laptop's input mount (§5.11). Right: the same units for sub16 (yellow), sub17 with writer threads off (green) and sub18 (grey), all three measured in one later session with the inputs in memory, as the sum of the launcher's phases (session C of §5.11). The right panel is a different measurement on a different scale and must not be read as a continuation of the left one. Within it, sub18 is at or below sub16 on all ten units; sub17 against sub16 was 3% in this session and 14% in another, so the size of each step is not established. sub19a has no such measurement.



Figure 9. Top: whole-process time on the laptop summed over the 65 single units, inputs read from the unit folders (warm). Each bar is the sum of every unit's best run; the dots are the sums of the single rounds behind it (three for sub5 and sub6, two for sub9 to sub15, one for sub4). After the step from sub4 to sub5 the total hardly moves: the later builds differ by less than the spread between rounds of one build (up to 14%, and 58% for one round of sub6), and from sub11 on they run without huge pages, which costs time on the laptop and none on the scoring host (§5.9). These times include the laptop's input mount, 10–20 ms per run (§5.11). Middle: the later measurement, with the inputs in memory, summed over all 71 units as the launcher's phases, grouped by session (§5.11). It is a separate series: its seconds are not comparable with the top panel, and only bars within one session are comparable with each other; sub16 appears twice, at 1.89 s and 2.23 s. sub19a was not measured this way. Bottom: total output size. sub5's uncompressed files are 2.6× larger than Arrow's; with delta encoding (sub6) they are 2.1× smaller than Arrow's; from sub10 the ledger is not written on six units. Output size was not recorded for sub16 and later; sub19a was checked to write the same bytes as sub16 on the 65 units. Output sizes are not affected by the input mount.

sub5 also made the launcher a static binary (1.4 MB; sub4 mapped 61 MB of shared libraries at start) and ran the trace and ledger output chains on separate threads.

5.5 Scores under the new rule

Submission	What changed	Score	Change	Against
sub4	Rewritten engine; launcher without Python; Arrow writer; 773 MB image	153,825.02 (and 151,386.96 on a second upload)	—	
sub5	Own Parquet writer and SHA-256; static launcher; parallel output chains	181,495.89	+18.0%	sub4
sub7 (scratch)	Delta-encoded integers; ledger encoded straight from engine records; launcher accepts whole numbers written as floats; **2.2 MB single-layer image without Python**	184,857.72	+1.9%	sub5
sub9 (scratch)	Memory work of §5.7: fewer page faults, fewer passes over memory	183,419.75	−0.8%	sub7
sub10 (scratch)	No message ledger on the six units whose card does not require one	188,687.15	+2.9%	sub9
sub11 (scratch)	Profile-guided build; earlier exit; huge-page requests and up-front buffer population switched off	189,018.28	+0.2%	sub10
sub13 (scratch)	Streamed output in 65,536-row groups; pooled threads; less allocation churn; at most four busy threads	184,046.62	−2.6%	sub11
sub16 (scratch)	Trace built in its final order during the run (no merge, sort or index pass afterwards), with exact repair for out-of-order rows; agent fields regrouped; allocator settings; sub11's writer	**203,394.47**	+7.6%	sub11
sub17, writer threads off	sub16 + branch-free heap step + helper thread started at engine creation	196,164.84	−3.6%	sub16
sub17, writer threads on	The same with both files written during the run	199,285.22	+1.6%	sub17, writer threads off
sub16, helper off	The sub16 binary with the latency helper thread switched off by an environment variable	185,818.35	−8.6%	sub16
sub18, helper off	sub17 + compact trace rows, less bookkeeping, wakeup rings, sorted blocked queues (§5.8); helper thread off	193,962.28	+4.4%	sub16, helper off
sub19a	sub18's engine with sub16's helper-thread code restored	199,057.73	+2.6%	sub18, helper off
sub16t	The sub16 binary with writer threads during the run (`T3_TRAIL=1`); the last Development upload	below sub16; exact score not recorded	—	sub16

The sequence of best scores is 153,825 → 181,496 → 184,858 → 188,687 → 189,018 → 203,394. It is not the sequence of uploads: sub9, sub13 and both variants of sub17 scored below the best at the time, the upload of sub16 with the helper off was a bet that did not pay (§5.10), that of sub18 with the helper off was made to measure, not to improve, sub19a, which combined the two things the host appeared to favour separately, scored 2.1% below sub16, and sub16t, the last upload, also scored below it. Every row is one upload; steps of a few percent are within the noise reported in §4.2. The last seven rows are discussed in §5.10.

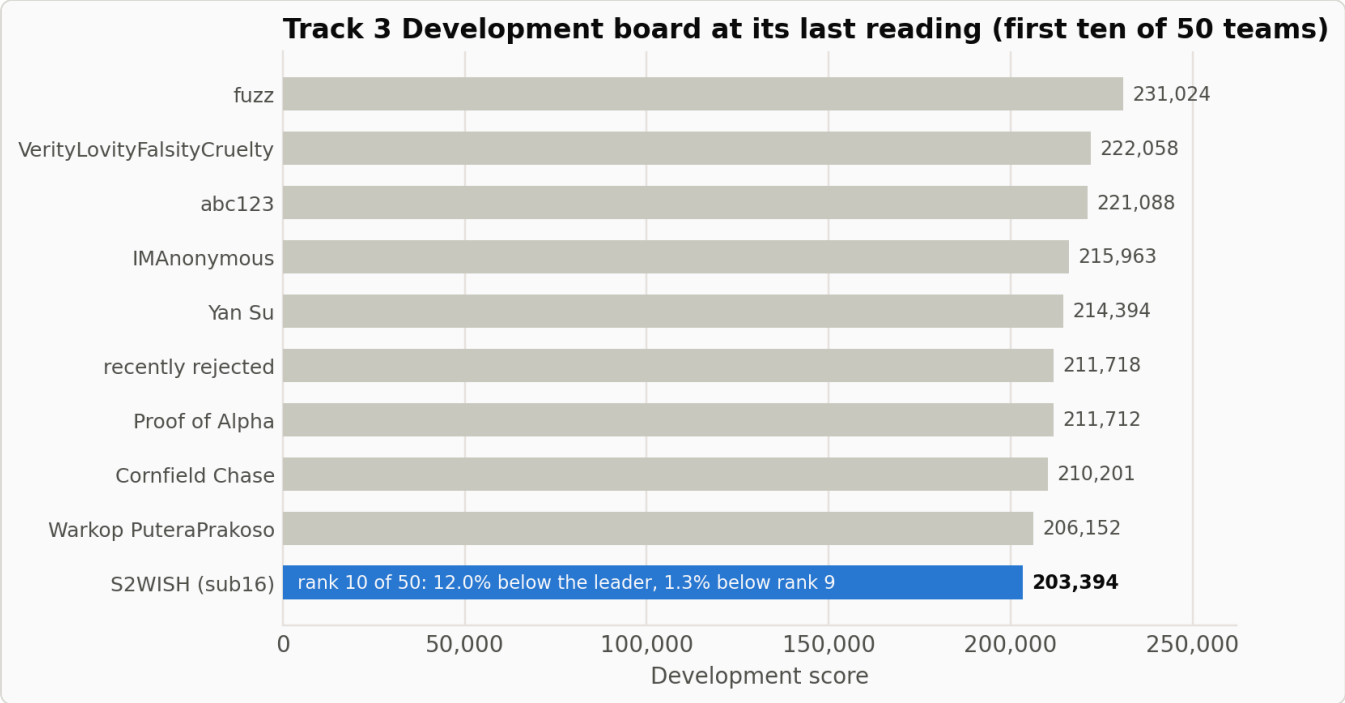


Figure 10. The first ten of 50 teams on the Development board, from a screenshot. The board keeps each team's best score; ours is that of sub16, 12.0% below the leader and 1.3% below the team in ninth place. sub19a and sub16t, the last two uploads, scored lower and did not change it; at the last reading we recorded, the team was still 10th of 50.

5.6 A model of the score

Let unit i have N_i events and local best process time t_i. We model the score as

score = mean over units of N_i / (c + $k \cdot t_i$),

with c the fixed container cost on the scoring host and k the ratio of their process speed to ours. The scores of sub4 and sub5 give two equations: **c = 0.551 s, k = 0.50**.

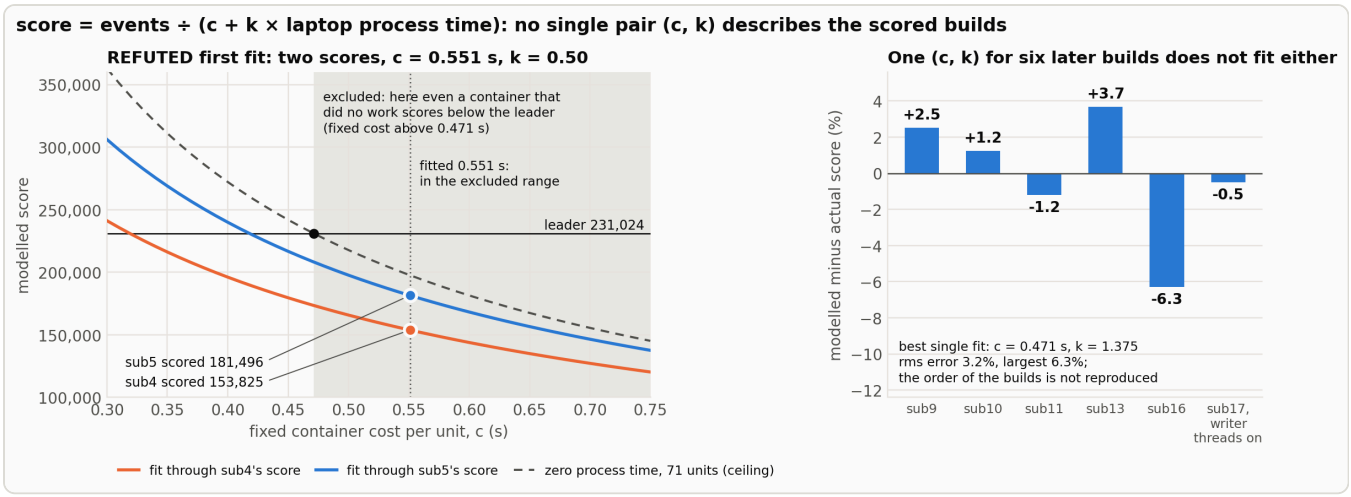


Figure 11. The score model and why it does not hold. Left: the first fit, refuted. The two curves are the model through our scores of sub4 and sub5 (computed on the 65 single units, k = 0.50); the dashed curve is the score of a container that does no work, over all 71 units. In the shaded range that ceiling is below the leader's score, so a fixed cost above 0.471 s is excluded, and the fitted 0.551 s lies inside it. Right: the best single pair (c = 0.471 s, k = 1.375) for six later builds, with laptop process time measured with the inputs in memory: modelled minus actual score per build. The errors reach 6.3% (rms 3.2%) and the order of the builds is not reproduced.

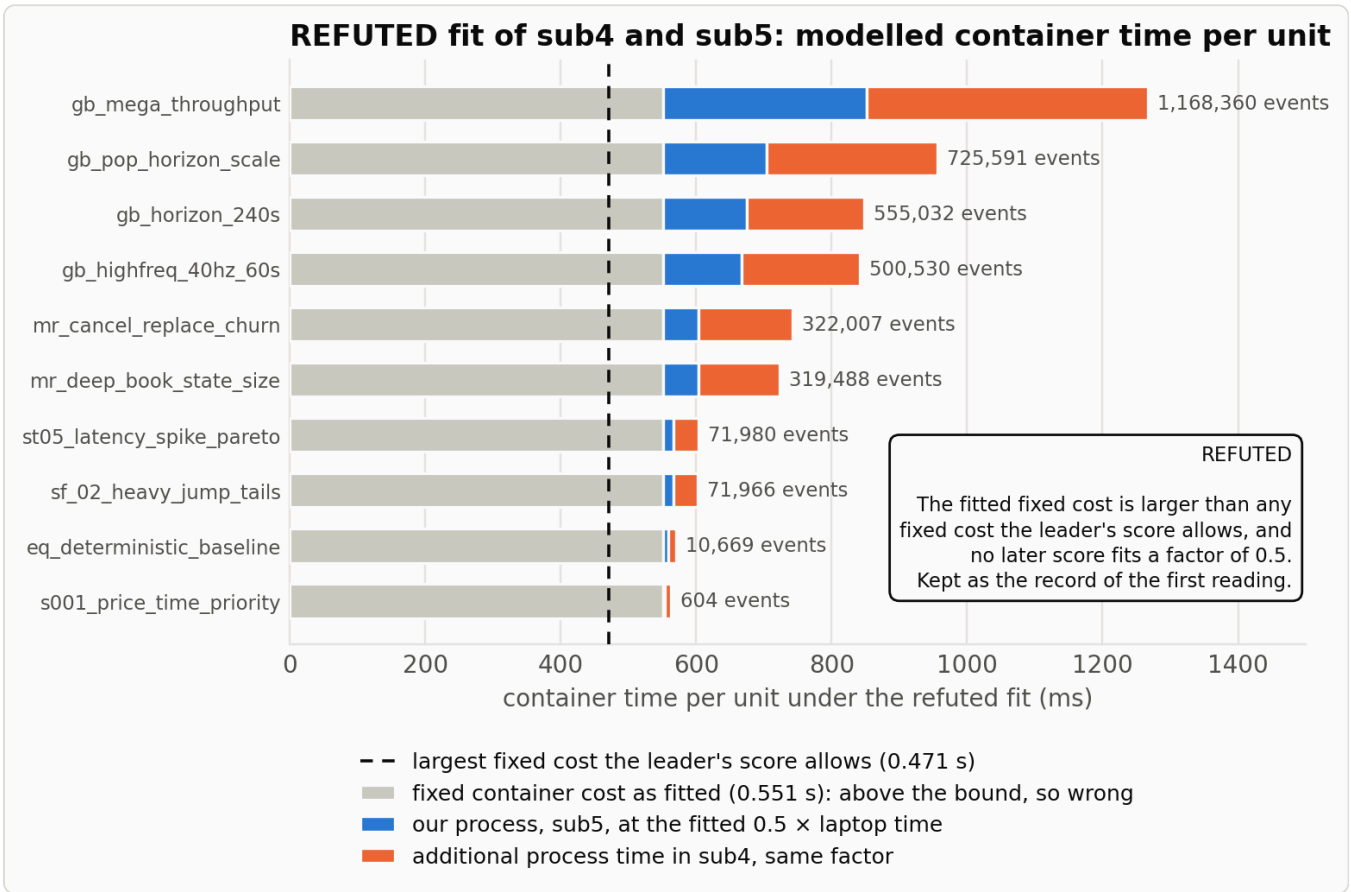


Figure 12. Container time under the refuted first fit, for ten units spanning the size range; kept as the record of what we believed. The dashed line is the largest fixed cost the leader's score allows (0.471 s); the fitted 0.551 s exceeds it, and the process parts are drawn with the fitted factor of 0.5 on laptop time, which no later score supports. What survives is qualitative: on small units the measured time is mostly a cost the participant does not control.

The fitted *c* agrees with independent published measurements of warm `docker run` (about 0.55–0.57 s for images from 5 MB to 155 MB). But the model's ceiling at $c = 0.551$ s is about 209,000, **below the leader's 231,024**. The model is therefore missing something. Candidates we could not test: the six batch units, which the model omits; a fixed cost that differs between units or submissions; run-to-run variation; and an error in transferring per-unit time ratios from our laptop.

Correction. The fit is wrong, not merely incomplete. The public roster has 7,728,572 events over 71 units, a mean of 108,853 per unit. A submission that did no work at all would score $108{,}853 \div c$, so the leader's 231,024 requires **$c \le 0.471$ s**, if the fixed cost is the same on every unit (for the organizers' higher calibration figure, see §5.12). With a lower *c* the same scores imply a larger *k*: our process is probably 1.5 to 2.4 times slower on the scoring host than in our warm laptop runs, not twice as fast. The two parameters cannot be separated from the scores we have; figures 11 and 12 show the superseded fit and are kept as the record of what we believed. (That range rests on laptop process times that include the input mount of §5.11, so it is itself only indicative.)

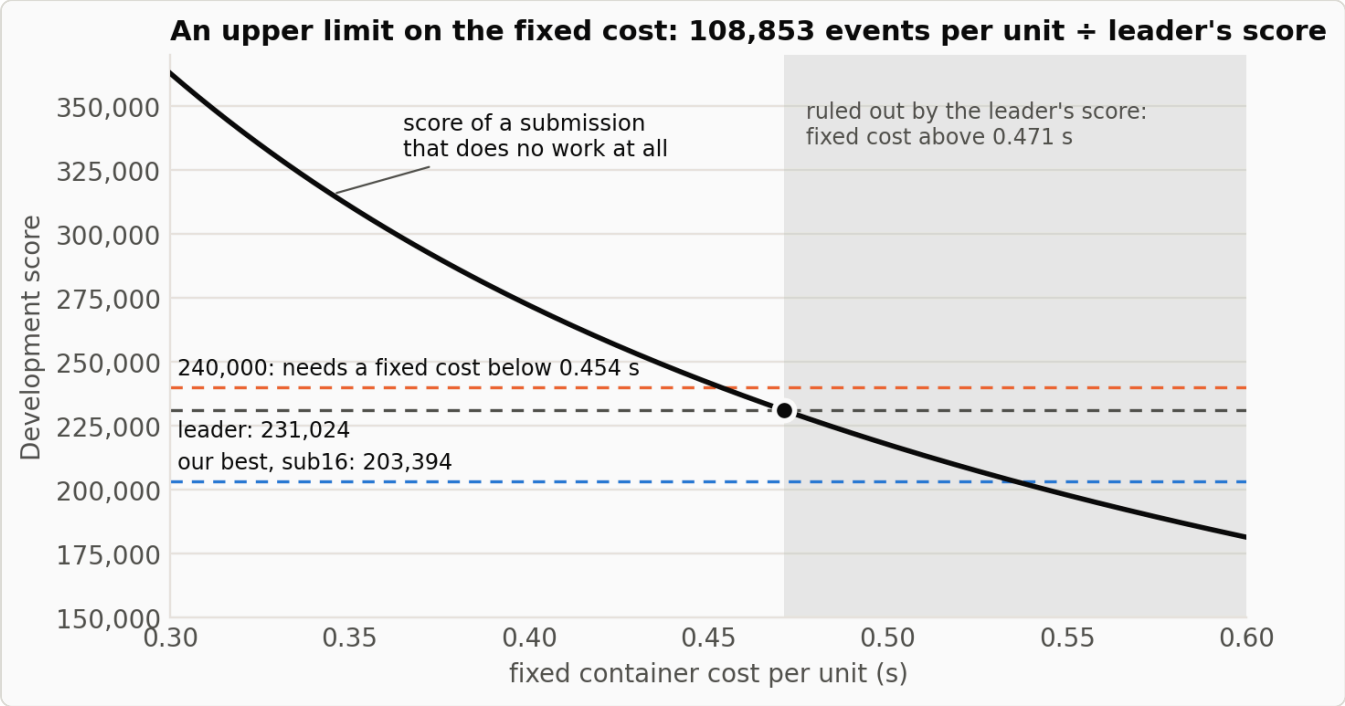


Figure 13. The score a submission would get with no process time at all, as a function of the fixed container cost. The leader's score rules out everything to the right of 0.471 s. Reaching 240,000 with no work at all would need a fixed cost below 0.454 s; with real work it needs correspondingly less.

No replacement. A review agent was asked to build the best score model it could from our scores and the corrected laptop process times. Its result is negative. A model of the form "fixed cost + k × laptop process time" cannot reproduce even the ranking of our own builds (rms residual 3.2%, largest 6.3%, against steps between builds of 0.2–7.6%). The smallest structure that fits needs five parameters for six points (a factor for the memory mode, a factor for the new engine, and a penalty of 27–41 ms per unit for builds that write incrementally), which is a description, not a model; a per-write cost came out inconsistent by a factor of 9–16. It predicted sub17 without writer threads at 205–209K if that penalty were real and 189–194K if sub17's own changes cost time; the score, 196,165, fell between, and the penalty reading was then contradicted when the same build scored higher with writer threads on. We gave three score projections for sub17 from laptop timing (197–205K; then 205–209K and 209–219K for the two variants); the scores were 196,165 and

199,285. The fixed cost on the host remains unknown, bounded above by 0.471 s; a participant from another team has reported "a fixed per-container cost of roughly half a second" (organizers' issue #34), which we cannot check. The same agent's arithmetic from sub16's score, for what it is worth as a bound and not a plan: 220,000 would need our process time on the host cut by 27% (if the fixed cost is 0.36 s) to 46% (0.44 s), and 230,000 by 41% to 68%.

5.7 Memory, not computation (sub8, sub9)

A code review found that on the largest unit the process touched roughly 430 MB of fresh memory to hold 98 MB of records and write 22 MB of output. Instrumenting the launcher with resource counters confirmed the pattern: summed over the units, kernel time (4.5 s) was almost equal to user time (5.0 s).

Change	Version
Encoder scratch buffers no longer zero-filled to their worst-case size	sub8
Pre-fault only the part of each engine buffer that is likely to be used (public units use at most 58–68% of the reservation)	sub8
Large column arrays aligned and advised for huge pages	sub8
Trace built as a 4-byte-per-row merged index; its columns encoded straight from engine records instead of from seven materialised arrays	sub9

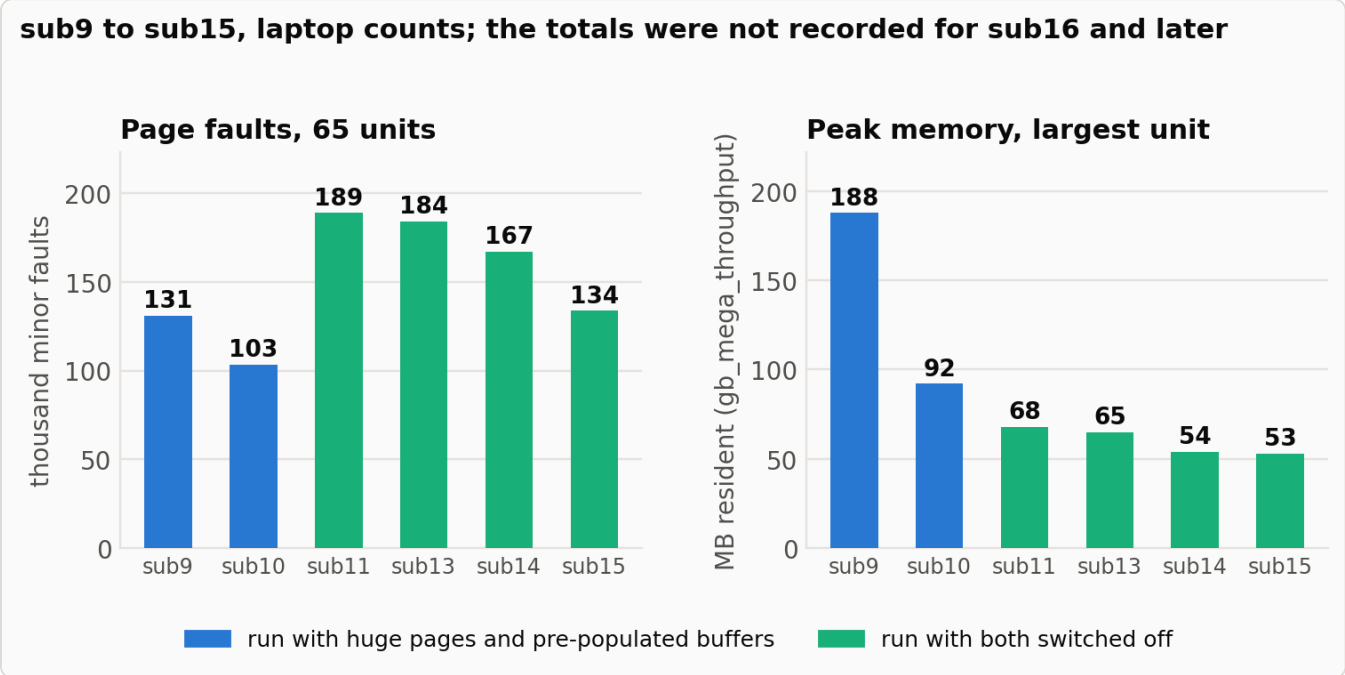


Figure 14. Left: page faults summed over the 65 units. Right: peak resident memory on the largest unit. sub9 and sub10 were run with huge pages and pre-populated buffers, as shipped; sub11 to sub15 with both switched off (sub14 and sub15 were never uploaded), which is why faults rise at sub11 while peak memory keeps falling. The earlier steps sub7 → sub8 → sub9 took faults from 367 to 191 to 125 thousand over 59 units. The figure stops at sub15 because these totals were not recorded for later builds; the only later count is on the largest unit alone, where the 32-byte trace row of sub18 took page faults from 14,654 to 12,354 on a test build (§5.11).

sub8 used 13% less process time than sub7 in four interleaved runs (3.75 s against 4.3–4.4 s over 65 units; both runs of each image agreed). sub9's timing is reported in §5.8. **On the scoring host this work showed no gain:** sub9 scored 183,420 against 184,858 for the build without it, one upload per side (§5.9). The section title describes the laptop.

5.8 Later builds

Every build below passed the same validation before it was pushed or used as a base: tables equal on 65 scenarios, byte-identical files across three repeated runs, 6 batch units under the runtime restrictions, the organizers' regression suite 65 of 65, and the fuzz replay 1,318 of 1,318. Exceptions are stated.

Build	What it adds to the one before	Local measurement	Score
sub8	No zero-filled scratch, partial pre-fault, huge pages, unicode-escape decoding	−13% process time over 65 units	not uploaded
sub9	Index-based trace output; hashing thread only for files above 4 MB	−12% process time over 65 units	183,420
sub10	No message ledger on six units (§5.9)	−11.9% on those six units	188,687
sub11	Profile-guided `-O3` build; exit before buffers are freed; memory switches (shipped off)	−1.9% from the build; switches off cost about +70% on the largest unit	189,018
sub12	Files streamed in 65,536-row groups through reused buffers	peak memory 92 → 88 MB on the largest unit	not uploaded
sub13	Pooled encoder threads, per-thread scratch, allocator settings, at most four busy threads, agent fields regrouped	3.62 s over 65 units against sub11's 3.86 s (inside the spread)	184,047
sub14	Trace built in its final order during the run; no merge or sort afterwards	−6.8% over seven units interleaved; peak memory on the largest unit 65 → 54 MB	not uploaded. Validation passed, but 29 fuzz cases with a negative latency fell to the reference path (see below)
sub15	One writer thread per file encodes, hashes and writes finished rows during the run, in 4,096-row groups; exact handling of out-of-order events restored	Fast checks pass (tables 65/65, no-ledger units 6/6, byte-stable and equal to the output without writer threads, 29 of 29 negative-latency cases equal to sub13). Timing against sub14 inconclusive: −14% in one interleaved run, +12% in another on a loaded machine	not uploaded; its full validation was started and stopped, and never completed

Build	What it adds to the one before	Local measurement	Score
sub16	sub15's engine with sub11's writer as the default: files built after the run, columns encoded on two to four threads; the writer threads of sub15 remain as a switch	4–7% less process time than sub11. The fuzz replay stopped at 200 of 1,318 in the first validation when Docker failed ("unexpected EOF"); repeated on the same image before the upload, it gave 1,318 of 1,318 (22 handed to the Python path)	**203,394**; with the helper thread off 185,818
sub17	(1) Heap step that chooses among four children by index arithmetic instead of branches; (2) helper thread starts producing at engine creation, with no mutex or condition variable, and the event loop returns to it whenever it is ahead instead of abandoning it for the run once it is late; (3) writer threads selectable at image build	Counters in §5.11. Full validation passed (run with writer threads on); fuzz replay 1,318 of 1,318, of which 1,293 in the launcher	196,165 (writer threads off); 199,285 (on)
sub18	(1) 32-byte trace row, with a guard that stops the run if a value does not fit; (2) own-order bookkeeping only for market makers, its only reader; (3) fast path for a trace bucket of one order row and no quote; (4) no delivery record when the ledger is skipped; (5) wakeups in up to four per-interval rings, the heap as catch-all; (6) blocked queues as sorted vectors with a read position; (7) the helper sleeps while its ring is full and is woken when half of it is used; ring enlarged from 2^{13} to 2^{15} values	Counters in §5.11. Full validation passed; fuzz replay 1,318 of 1,318, of which 1,291 in the launcher	193,962 with the helper thread off. **Not scored with the helper on**
sub19a	sub18's engine with sub16's helper code restored verbatim (woken at the start of the run, spinning when its ring is full, ring of 2^{13}, permanent fallback to drawing in the loop once late)	Byte-identical to sub16's output on 65 of 65 units; tables, repeat-run bytes, batch, fallback and official regression passed; fuzz replay 1,318 of 1,318 (22 handed to the Python path); scratch image checks passed; pushed as `native-v19a`	199,058

A variant, sub19b, differs from sub19a only in restoring the branching heap step; it produces the same bytes on the 65 units and passed the full validation in its full image (fuzz replay 1,318 of 1,318); no scratch image of it was built and it was never uploaded. An image of sub18 with the sleeping helper switched on was pushed and never uploaded.

A gap that the validation exposed. sub14 passed every validation step, but the fuzz replay's breakdown changed: 29 cases that earlier builds handled in the launcher were now handed down to the reference path. All 29 use a negative network latency, which lets an event be delivered before the current time, so trace rows no longer arrive in time order. Earlier builds had a full-sort path for that; building the trace during the run had dropped it and failed the run instead. The outputs were still correct, because the full image falls back, but a scratch image has no fallback and would have failed those units. sub15 rebuilds the trace by the full rule when it happens and restarts the file its writer thread had begun. A pass or fail verdict would not have shown this; the count of who handled each case did.

The count moves again. The same count shows a second, smaller effect that is not resolved. In a launcher-only pass the launcher declines 23 of the 1,318 cases, identically for sub16, sub17 and sub18 (19 for a flag that is not a boolean, 4 for the `log` guard of §7.3). In the full replays it handed down 25 cases in sub17 and 27 in sub18. Our explanation, not confirmed by a targeted test: the helper thread draws latencies ahead of the event loop, a draw the run never consumes can still raise the global "sensitive to `log`" flag, and the larger ring of sub18 looks further ahead. In a full image such a case falls back and passes. In a scratch image it would exit with status 127 and the unit would score zero. No public unit is affected: all 71 are handled by the launcher in every run made. The effect is also a correctness risk under the Final's rule that all five runs of a unit write the same bytes, and a fix applied to sub16's engine is in the Final image, where the fuzz replay gave 1,318 of 1,318 with 22 cases handed to the Python path (§5.12).

5.9 What the scoring host rewards

By the time sub13 was scored we had six steps with both a laptop measurement and a host score.

Step	Kind of change	Laptop, warm	Host
sub4 → sub5	Interpreter and Arrow encoder removed	−67% process time	+18.0%
sub5 → sub7	Smaller files, direct ledger encoding, 2.2 MB image	a few percent	+1.9%
sub7 → sub9	Fewer page faults, fewer passes over memory	−23%	−0.8%
sub9 → sub10	Ledger not recorded or written on six heavy units	−11.9% on those units	+2.9%
sub10 → sub11	Profile-guided build, earlier exit, memory switches off	−1.9%, then about +70% on the largest unit	+0.2%
sub11 → sub13	Streamed writer, pooled threads, thread cap, allocator settings	−6% over 65 units, inside the spread	−2.6%

The large step (removing the interpreter and the Arrow encoder) paid on the host. The rest are single uploads a few percent apart and are not established (§4.2); the clearest pattern is one of size, not sign: −23% process time from memory work on the laptop came with no visible gain on the host.

The last row is the least understood. sub13 changed five things at once and was uploaded without a timing comparison, because the machine was busy and warm timing had just been discredited. Our first explanation was that its writer encodes any file below 65,536 rows on one thread where sub11 used several; the laptop measurement taken afterwards does not support that (sub13 is, if anything, faster there on small units). The drop is 1.6 times the difference once seen between two identical uploads, and well inside the 14% another team later reported between identical images (§4.2), so it may be noise. We do not know which of the five changes, if any, cost the 2.6%. sub16 therefore returned to sub11's writer and changed, in the main, one thing: the trace assembly. It scored 203,394 (§5.10). The reading we favoured at the time, that a streaming writer as such loses on the host, was not supported by the later writer-thread uploads, which are themselves single uploads; sub13 is unexplained.

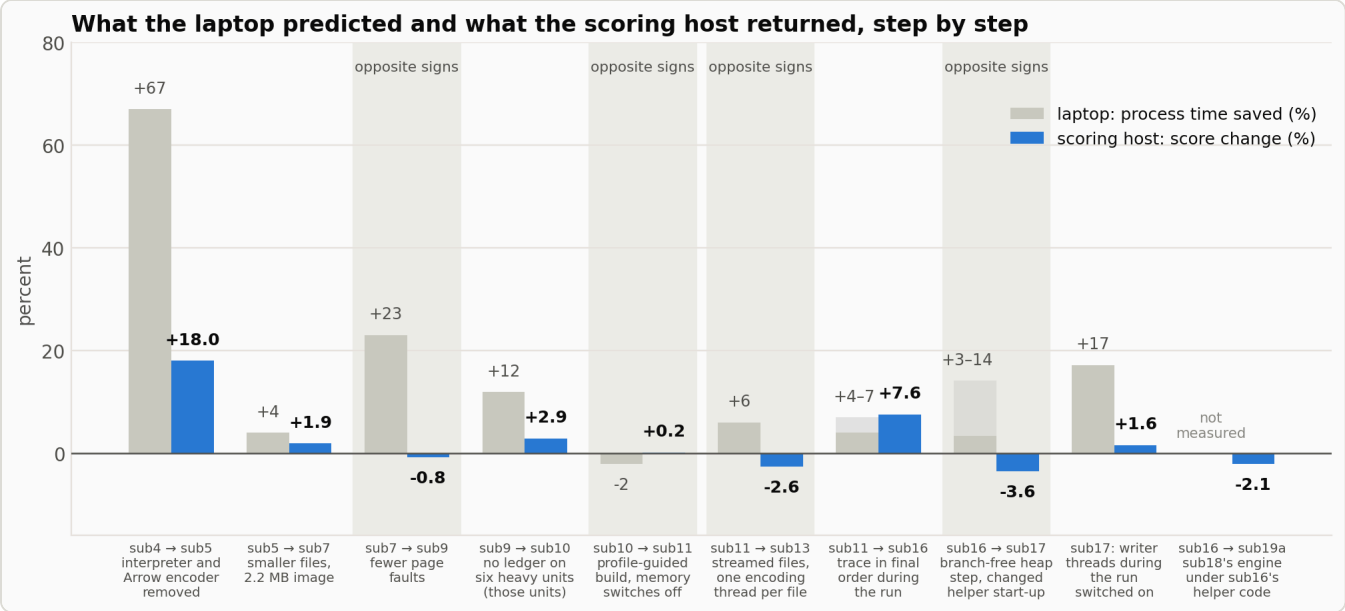


Figure 15. For each step between scored builds: the change in process time measured on the laptop (grey, positive = time saved) and the change in score on the scoring host (blue). The first six steps are those of the table above; the laptop over-promised on memory work, under-promised on removed output, and had the wrong sign for sub13. The last four are from the final uploads (§5.10). For sub11 → sub16 the laptop comparisons gave a range of 4–7%; the bar is solid up to the low end and lighter up to the high end. For the two sub17 steps the laptop figure is process time over all 71 units with the inputs in memory; sub16 → sub17 was timed in two sessions, which gave 14% and 3%, and is drawn as a range in the same way. The laptop saw a gain in both sessions where the host returned −3.6%. For sub16 → sub19a (−2.1% on the host) no laptop figure of that kind was taken. The laptop bar for sub5 → sub7 is the one measured for the intermediate build sub6. In four of the nine steps that have both figures, shaded, the two instruments disagree in sign; every host bar is one upload per side, and all but the first and the sub11 → sub16 step are within the noise reported in §4.2.

The ledger rule. Each unit's card states whether a message ledger is required (`[scoring.params].requires_message_ledger`). Twelve of the 71 public cards say it is not: six single-scenario units and the six batch units. The organizers' README tells submissions not to write the file on such units; the scorer returns a pass for the ledger gate without opening it, and the two ledger fields of `events.json` are not among its required keys. Batch units need a ledger for every sub-scenario regardless. The organizers confirmed that the runner mounts a unit's input folder as a whole, so the card is present beside the scenario; that writing the ledger everywhere is always safe; that batch units need a ledger for every sub-scenario whatever the card says; and that the scenario family must not be used as a stand-in for the flag. The six usable units hold 3.32 million of the 7.73 million public events. The launcher reads the card that is mounted beside the scenario and skips the ledger only for that exact declaration; anything else means the ledger is written. We had read that README section for the file format and missed what it permits for nine days.

Warm and cold. All our timing had repeated `simulate` inside one running container and taken the best of N. The host starts one fresh container per unit and runs once. Timed that way on the laptop, the largest unit's process took 500 to 1,200 ms against 232 ms warm, and its buffer set-up phase ranged from 33 to 429 ms between runs. The laptop's Docker VM has 2.76 GiB of memory and its input mount is Windows-backed (two days later we measured what that mount costs, §5.11), so much of that is the laptop. CPU-quota throttling was not involved (zero throttled periods in six of six runs). The conclusion we draw is narrow: **local timings of anything related to memory or threads are not evidence about the scoring**

host, in either direction, and an upload is the only instrument. Uploads are capped at 5 per day and, as we believed that day from a toolkit document, 20 in total; the competition page allows 23 per person (§8).

5.10 Six uploads that change one setting

sub16 was uploaded and scored 203,394.47, 7.6% above sub11 (one upload per side); the laptop comparisons had suggested 4–7% less process time. Five more uploads followed, each meant to differ from a scored one in one setting. Each is a single upload, and all but the first comparison below are a few percent, within the noise reported in §4.2: they are recorded as observed, not as established.

Upload	Build and setting	Score
975649	sub16, scratch image, memory switches off	203,394.47
976478	sub17, writer threads off	196,164.84
976489	sub17, writer threads on (`T3_TRAIL=1`)	199,285.22
976768	sub16 binary, latency helper thread off (`T3_LAT_THREAD=0`)	185,818.35
976794	sub18 binary, helper thread off	193,962.28
977400	sub19a: sub18's engine with sub16's helper code	199,057.73

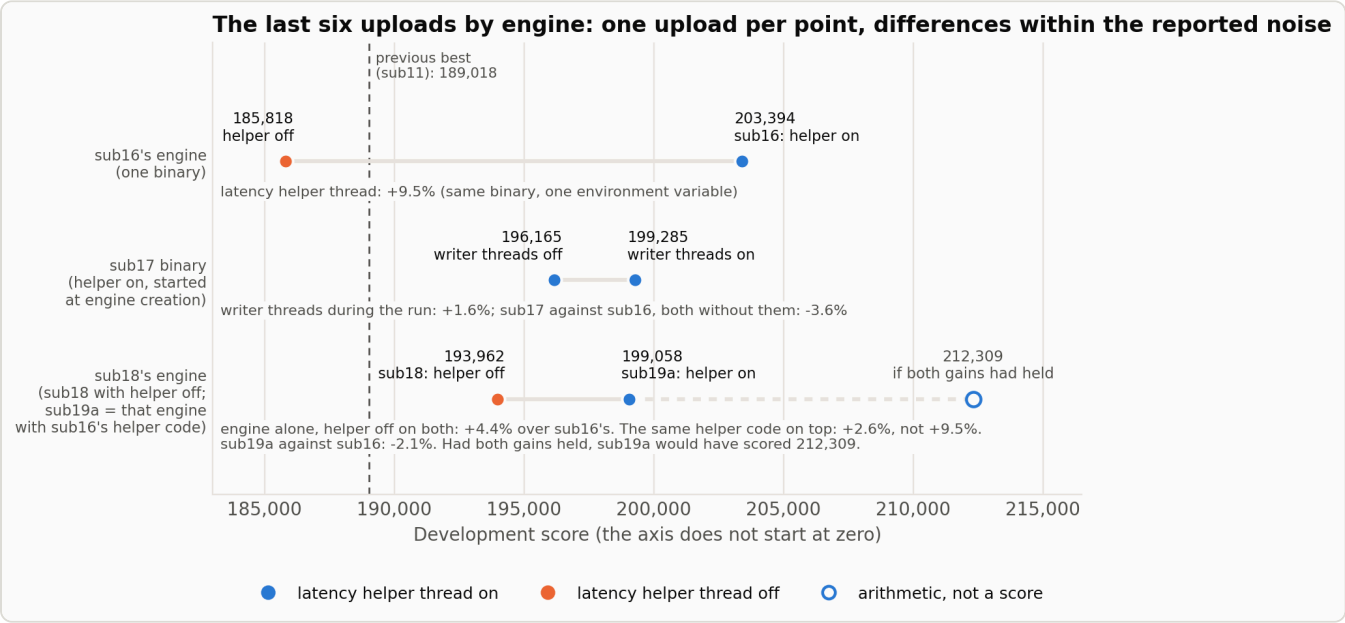


Figure 16. The scores of the last six uploads (the six of the table above), grouped by engine. Blue: latency helper thread on; orange: off. On sub16's engine the helper thread was 9.5% ahead (185,818 → 203,394); on sub18's engine the same helper code was 2.6% ahead (193,962 → 199,058). With the helper off on both, sub18's engine scored 4.4% above sub16's, yet sub19a scored 2.1% below sub16: the two differences did not add up. The hollow marker is what sub19a would have scored had both held (193,962 × 203,394 ÷ 185,818 = 212,309); it is arithmetic, not a score. The horizontal axis does not start at zero. Each filled point is one upload; another team has reported identical images up to 14% apart on this board (§4.2). The last Development upload, sub16 with writer threads on, scored below sub16; its exact score was not recorded and it is not drawn.

Comparison	Host result	How we read it (one upload per side; all but the first not established)
sub11 → sub16	+7.6%	Building the trace in order during the run, with the three passes after the run and their threads removed, scored more than the laptop suggested; larger than the other steps, still one upload per side
sub16, helper off → sub16	+9.5% (−8.6% read the other way)	Same binary, one environment variable: the cleanest single-variable comparison of the project, but one run against one run and within the reported noise (§4.2)
sub16, helper off → sub18, helper off	+4.4%	sub18's engine, which contains sub17's branch-free heap step, scored higher at an equal helper setting
sub16 → sub17, writer threads off	−3.6%	By elimination we first put this down to sub17's changed helper start-up; with every row a single upload, that elimination does not hold. **Not established**
sub17, writer threads off → on	+1.6%	Writer threads during the run scored slightly higher on this binary
sub18, helper off → sub19a	+2.6%	sub16's helper code under sub18's engine: 2.6% ahead here, against 9.5% on sub16's engine
sub16 → sub19a	−2.1%	The engine difference (+4.4% without a helper) and the helper difference (+9.5% on sub16) did not add up

The bundle. sub17 shipped two things together. One was measured: the branch-free heap step cut branch misses on the largest unit from 11.59 to about 5 million and cycles by 8–17% (§5.11). The other was speculative: the helper thread's start-up was changed "as a safeguard", with no evidence from the host that the old start-up was a problem. The build scored 3.6% below its predecessor. The two helper-off uploads pointed away from the engine, but as single uploads within the reported noise they do not settle that, and whether anything went wrong with the helper at all is open. A guess, untested: a thread that runs from the moment the engine is created is placed by the scheduler's balancing at thread creation, possibly far from the simulation thread and even on another socket, whereas a thread woken by the simulation thread at the start of the run is placed near it. The leading team's member has written, in the organizers' issue tracker, that whether the simulation thread shares a physical core with a helper thread moves a large unit's median window by about 6%; that is their statement about their program, not a measurement of ours. sub19a (§5.8) restored sub16's helper code under sub18's engine to test the elimination argument directly. It scored 199,057.73: above sub17 without writer threads, but 2.1% below sub16. Restoring the old start-up did not restore the old score in this single upload; neither the elimination nor its refutation is established. A second guess, equally untested: once the event loop is fast enough it catches up with the helper, and in sub16's helper code a loop that finds the helper behind at the start draws its own latencies for the rest of that run, so a faster engine forfeits most of the helper's benefit.

What we announced that day and had to withdraw. We keep these in the record because they are the finding.

- "Writer threads lose on the host." Said when 199,285 (writer threads on) arrived before the score of its comparison build and was read against sub16's 203,394. The comparison build then scored lower still, 196,165, so the announcement was not supported (the 1.6% difference itself is within the reported noise).

- "Adding or strengthening a thread loses; removing threads wins." A pattern read from nine score steps, with one counterexample dismissed. On its strength we held it more likely than not (60 to 40) that sub16 with the helper off would beat 203,394, and spent an upload on it. It scored 185,818, 8.6% lower (one upload per side).
- Three score projections for sub17 from laptop process times (§5.6), none of which held.
- A piece of arithmetic (185,818 × 1.056 = 196,222, close to sub17's 196,165) suggested that sub17's helper was not working at all on the host. The sub18 upload neither proved nor disproved that; it showed only that the engine is better.

After the sixth upload the team had used 22 of its 23 uploads. The 23rd and last went to sub16t: the sub16 binary with writer threads during the run (`T3_TRAIL=1`), checked beforehand to be the same binary and to pass the batch units (6/6), the official regression (65/65), the no-ledger units (6/6) and repeat-run byte identity on the 65 single units. It scored below sub16; its exact score was not recorded. Writer threads were thus 1.6% ahead on sub17's binary and behind on sub16's, one upload each; neither comparison is established (§4.2).

5.11 Counting instead of timing

The input mount. A system-call trace of the smallest unit (`t3-s001-price-time-priority` , 604 events) showed 9.65 ms in the first `openat` of `card.toml` , 2.08 ms in the `openat` of `scenario.json` , and 0.2–1.0 ms for each `read` , `fstat` and `close` on those files. Everything after the inputs had been read took under 4 ms. The unit folders are a Windows-backed mount, and each run paid 10–20 ms for it that the scoring host does not charge.

What this affects. This was established for measurements taken from the unit folders: the sub11 and sub15 series of Figure 8, the sub9–sub15 bars of Figure 9, the 3.62 s and 3.86 s totals in §5.8, and the laptop bars for sub10 → sub11 and sub11 → sub13 in Figure 15. The lab record treats every whole-process laptop figure from sub4 on as affected, which adds Figure 7, the sub4–sub6 values of Figures 8 and 9, and the process-time entries of the tables in §5.8, §5.9 and §7.1; the earliest of those measurements were not themselves traced. A constant per run cancels in a difference between two builds but dilutes every ratio, and over 65 runs it amounts to 0.65–1.3 s inside totals of 3.4–3.9 s (our arithmetic from the per-run figure, assuming it is the same for every unit). Counts (page faults, peak memory, output size, instructions) are not affected, nor is any host score.

Process time with the inputs in memory. All 71 units (65 single and 6 batch), best of 5, in seconds. For single units this is the sum of the launcher's phases, so it is not directly comparable with the whole-process totals above.

Session	Builds
A	sub16 1.895; sub17, writer threads off 1.627; sub17, writer threads on 1.348
B (older binaries)	sub9 1.838; sub10 1.736; sub11 1.982; sub13 1.759
C (later, slower)	sub16 2.228; sub17, writer threads off 2.152; sub18 1.876

Only ratios within one session mean anything, and not always those: sub17 is 14% faster than sub16 in session A and 3% faster in session C. A further run of eight binary and helper combinations was thrown away: the laptop was two to three times slower than in the earlier session, and two rounds of one binary differed by up to 45%.

Hardware counters. One thread (helper and writer threads off), profile-guided builds, user-mode counts in millions.

Unit	Build	Cycles	Instructions	Branch misses
`t3-gb-mega-throughput` (largest: 144 agents, 1,420,862 kernel events, 1,168,360 trace rows, no ledger)	sub16	934–945	1,395	11.59
	sub17	787–863	1,324	4.93–5.12
`t3-mr-deep-book-state-size` (269,644 kernel events, 115,505 of them re-queued as blocked)	sub16	279–289	420.6	2.53
	sub17	255–275	407.8	1.64–1.67
`t3-as06-throughput-fast`	sub16	72.0	not recorded here	0.643
	sub17	66.6	not recorded here	0.412

With the helper off, the heap step is the engine change that separates these two builds. It removes 5% of instructions and more than half of the branch misses on the largest unit.

The changes of sub18 were measured one after another on test builds without profile feedback (same unit, one thread, millions):

Build	Instructions	Cycles	Branch misses	Other
sub17 engine	1,491.7	830–850	—	
+ 32-byte trace rows	1,470.2	797–805	5.12	page faults 14,654 → 12,354 (a count, not millions); cache misses 2.6–2.8 → 2.05–2.14
+ own orders only for market makers, one-row buckets, no record for a skipped ledger	1,429.0	750	4.71	
+ wakeup rings and sorted blocked queues	1,381.5	733	4.35	on `t3-mr-deep-book-state-size` this step took cycles from 264.6 to 237.8 and branch misses from 1.77 to 1.58

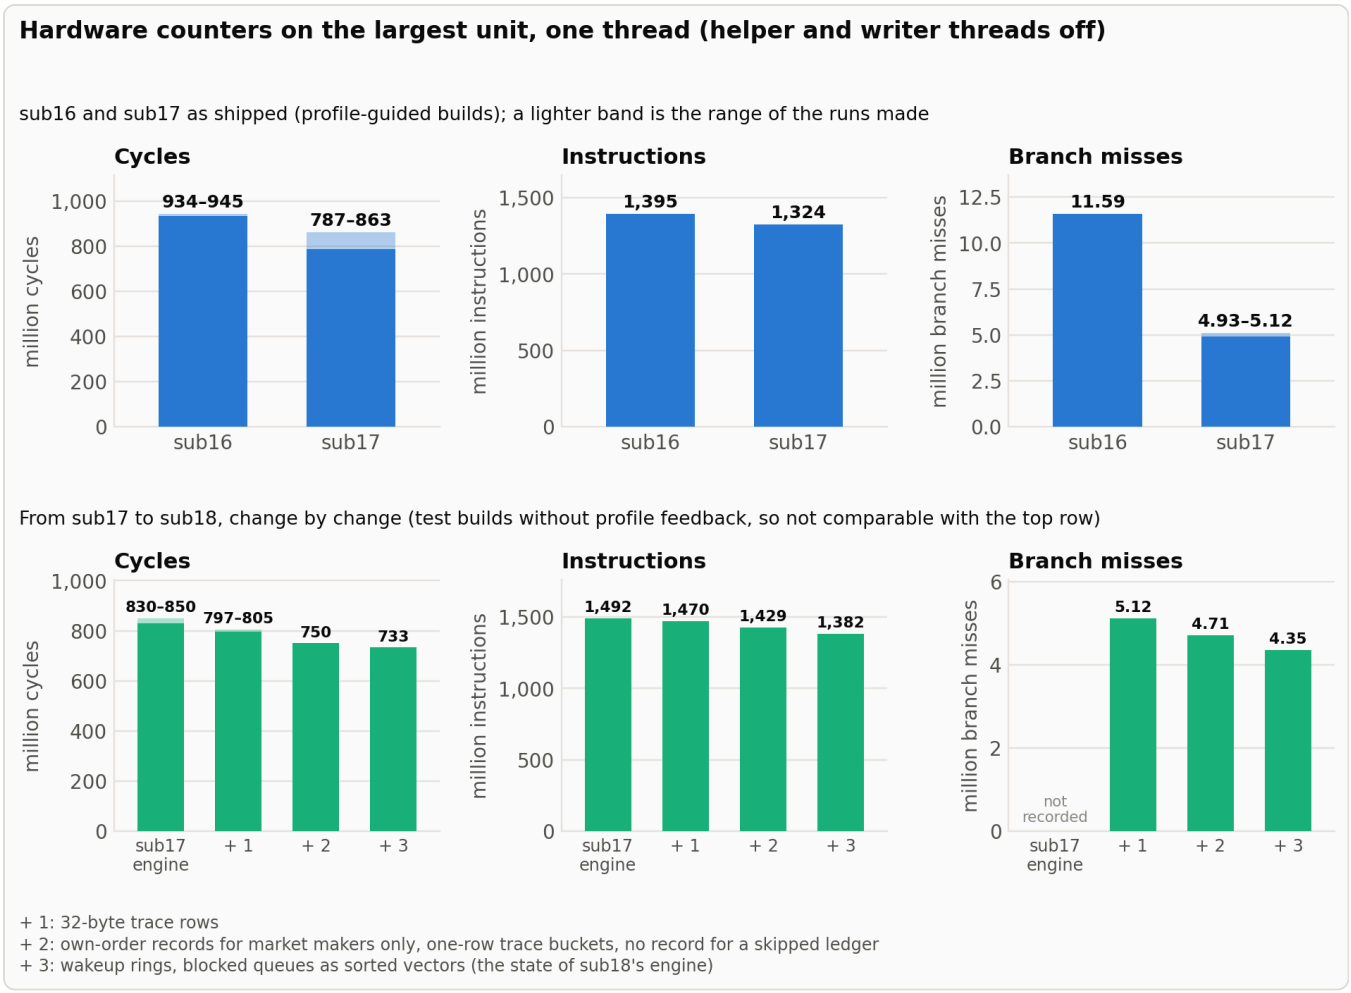


Figure 17. Hardware counters on the largest unit, one thread. Top: sub16 and sub17 as shipped (profile-guided); where several runs gave a range, the lighter band shows it. Bottom: cycles, instructions and branch misses after each group of changes that went into sub18, on test builds without profile feedback, which is why the first instruction bar is higher than sub17's in the top row; the two rows are not comparable. The branch-miss count of the first test build was not recorded. No counter run of sub18 as shipped or of sub19a was recorded, so neither appears; sub19a's engine is that of the last bar with the helper-thread code of sub16, which this one-thread measurement does not exercise.

In total sub18's changes remove 7.4% of the instructions of the sub17 test build on this unit. On the host, with the helper off, sub18 scored 4.4% above sub16 (one upload per side, not established); that step contains the heap change as well, and no upload separates the two.

Where one thread's cycles go (largest unit, sub17 test build): the event loop with its inlined handlers 21.7%; latency draws about 27.5% (the normal deviate 11.5%, `exp` 7.4%, `log` 4.3%, the latency function 4.4%); output encoding and SHA-256 about 20%; the heap step 5.8%; sending 4.1%; setting wakeups 3.7%; limit-order handling 3.6%; closing trace buckets 2.6%. The latency share is the work the helper thread takes off the simulation thread.

The helper and the writer threads on the laptop. With the helper the simulation phase of the largest unit took 211–220 ms, without it 257–298 ms (52–55 against 61–63 ms on the deep-book unit; 122–138 against 151–170 ms on `pop-horizon-scale`). Here the laptop and the single host pair agree in sign. A helper that sleeps while its ring is full was slower than a spinning one at the old ring size (minimum and median of 13–15 interleaved runs on `horizon-240s`: 115.6 and 125.8 ms against 104.3 and 118.4) and faster with a ring of 2^{15} values (99.1 and 105.8), which is what sub18 uses; with that ring it was also slightly faster on the largest

unit (221.0 and 246.2 against 226.8 and 262.6) and about equal on the deep-book unit (61.0 and 66.2 against 60.4 and 65.7). This sleeping helper has no host score. Writer threads during the run cut the laptop's process time on every unit tried (largest unit 198.3 → 175.7 ms; deep-book 63.9 → 51.9; `cancel-replace-churn` 62.0 → 46.4, best of 9, same binary), 17% over all units in session A, where the host returned 1.6% in one pair.

Tried and dropped. A heap padded with sentinels, so that every node has four readable children, removed a further 2.0% of instructions on the largest unit (1,324.3 → 1,296.0 million) but left cycles within noise and slightly worse on one unit. It was reverted before sub17 was built: fewer instructions is not the goal.

5.12 The Final

Rules. The Final ("Final & Verification" phase) took one upload per team at any time in a window of about two weeks after Development closed. A Final upload that ends Failed does not use the attempt; one that is held does. Code could change after Development, and ties go to the earlier upload. Each unit runs five times back to back with the same seed; its rate is verified events divided by the median of the four runs after the warm-up, each run timed from Docker's `StartedAt` to `FinishedAt`, so creating and removing the container are not counted. The score is the arithmetic mean of the unit rates over the whole roster: the public units and an unpublished number of sealed scenarios. Every scenario must pass ("a single failure anywhere is inadmissible"); a run that crashes, times out (300 s) or runs out of memory scores the unit 0, and all runs of a unit must write byte-identical trace and ledger files. The runtime is that of Development (§2.2), with the GPU attached through CDI. Outputs, logs, per-unit outcomes and the Final board stay hidden until the results are published.

Calibration. The organizers timed minimal images on the timing machine, a KVM virtual machine on an Intel Xeon Platinum 8570 with 20 vCPUs (10 cores × 2 threads) and one NVIDIA B200 (issues #24 and #34).

Image that only copies outputs	Final window, median	Create-to-remove, as the Development board counted it
Static binary	0.165–0.173 s	0.630–0.643 s
Python image	0.342–0.343 s	not given

About 0.46 s per unit that the Development board counted falls outside the Final window, so the Final score is on a different scale from every Development score in this report. The create-to-remove figure is also above the bound $c \le 0.471$ s that §5.6 derives from the leader's Development score. The likely explanation has two parts. The organizers' figures came from their Final timing path, which they said "adds a few organizer checks inside that span", so that "a Development run of the same image may come out a little lower"; and the bound assumes the same fixed cost on every unit. The most likely reading is that Development's create-to-remove was lower than the rehearsal's; the published figures do not settle it.

Two defects in the best image. Preparing the Final, we exercised paths that no Development score had touched, and found two defects.

1. *The last-resort ABIDES path crashed on the read-only root.* `sub/abides_fork/simulate.py` called `abides.run(config)` without a log directory. With the reference path forced (`T3_NO_LAUNCHER=1 T3_FORCE_REFERENCE=1`) under the Final's restrictions, the sub16 full image exited with `OSError:`

`[Errno 30] Read-only file system: './log'` and wrote no files (`lab/ref_path_check.sh`, `lab/bench/refpath_sub16/`). The batch path was not affected, because it changes into a temporary directory. The organizers' own baseline had the same bug (ABIDES writes `summary_log.bz2` under `./log/`), fixed upstream in commit `fe32378`. The scored scratch images have no Python layer, so no score was affected; a declined input in any of our full images would have been. Fix: `abides.run(config, log_dir=tempfile.mkdtemp(prefix="abides-log-"))`.

2. *The hand-over decision could depend on thread timing.* This is the look-ahead effect of §5.8: the helper thread raised the "rounding-sensitive" flag for draws the run might never use, and on sub16 launcher-only passes over the stored fuzz cases declined 23 while full replays handed 22 to Python. Across the five runs of a sealed unit this could send one run to the Python path and not another: different file bytes, and a refused unit. Fix (`lab/bench/engine_final.cpp`, made from `lab/bench/engine_sub16.cpp`): the latency function reports sensitivity through an argument; the event loop's own draws raise the global flag as before; the helper records only the index of the first sensitive draw it computed, and after the run that counts only if the loop used the ring and the index is below the number of values it consumed.

The build. sub16's engine, launcher and Parquet writer (the launcher and writer byte-identical to the sub16 snapshots) with the two fixes, in the full image with the exact Python fallback, with the memory and writer settings of the 203,394 run (`T3_HUGE=0 T3_PREFAULT=0 T3_TRAIL=0`). The image `native-final` is 773 MB, `linux/amd64`, interface label 2.0, with no `VOLUME` and no entrypoint: the command starts the static launcher directly.

Why the full image. With all-or-nothing correctness on sealed scenarios, an input the launcher declines makes the scratch image exit with status 127, a crash. In the timed window both images start the same static launcher, and Python loads only for a declined input. What the full image costs on the host was never measured: no Development uploads were left. The choice was therefore a risk decision, not a measured one. Decision round 8, given both sides, chose the full image with probability 0.97 (the scratch image as scored 0.01; a new scratch image of the fixed binary 0.02). It put the probability that at least one sealed scenario would be handed over at 0.56, and that the full image would score more than 1% below the scratch image at 0.36 (more than 3%: 0.23). These are judgments, not measurements.

Validation (`lab/bench/validate_final.log`, `checks_finalm.log`, `fuzz_final.log`, `refpath_final/`, `pullcheck/`).

Check	Result
Output bytes against the sub16 binary, 65 single units, helper thread on and off	identical
Tables equal to the reference	65/65
Repeat-run bytes, three runs	65/65
Batch units under the runtime restrictions	6/6
Forced fallback under the restrictions, two modes	both wrote their three files
Organizers' regression harness	65/65, on the image and again on the image with the memory settings

Check	Result
Units that need no ledger	6/6
Fuzz replay against recorded reference hashes	1,318 of 1,318 (1,296 in the launcher, 22 handed to the Python path)
Reference path forced under the Final's restrictions	one single unit (604 and 664 rows, equal to the reference tables) and one batch unit
Image pulled back by digest, one unit under the restrictions	tables equal to the reference (71,932 and 63,287 rows)

Result. Upload 993712 finished with a primary score of **1,755,232.6496** events per second on the Final metric. The run summary page lists the kinds of problems a run had, and it listed none. On a sealed phase it shows no unit count and no per-unit outcomes, so we read it as no unit having failed, not as a unit-by-unit proof. The Final board and other teams' Final scores are hidden until publication, so no rank is known. The score is not comparable with any Development score here, since the Final window leaves out about 0.46 s per unit that Development counted.

---

6. Investigations

6.1 Why did the first native submission score half of what the engine could do?

A `perf` profile of the loop showed about a third of the time in the kernel's page-fault handler for output buffers that are written once. Pre-faulting them, timing the same scope as the reference adapter and fixing the batch timer took the score from 4.26M to 8.34M.

6.2 Why did a few units stay far below the others?

Per-scenario loop counters showed "requeue storms": on `mr_deep_book_state_size`, 711,316 of 980,960 loop iterations did nothing but re-insert a message whose recipient was still busy. Per-agent blocked queues removed them. This did not explain the largest units (few requeues; deeper heaps) or the smallest ones (more ledger rows per trace row).

6.3 Why was our engine suddenly irrelevant?

Before optimising the loop further we had a research agent re-check the rules. It reported that our local copy of the rules was a month old and that scoring had changed. We verified the three key facts directly (the organizer's post, the README, the live board) rather than relying on the summary. Our first direct check failed: the issue page showed only its opening text, and the announcement was a later comment found through the API.

6.4 Why did the launcher decline 73% of fuzz inputs?

Replaying the stored fuzz corpus (below) showed the launcher handling only 358 of 1,318 cases itself. The reason, in 941 cases: the generator writes whole numbers as floats (`"threshold_ticks": 2.0`) and the launcher refused any float where an integer was expected. Python's `int()` truncates them. None of the 65 public scenarios does this, so nothing had flagged it, but any such unit would have run on a path a second slower. After mirroring `int()` exactly the launcher handles 1,295 cases; the remaining 23 are a non-boolean flag (19) and the `log` -sensitivity guard (4).

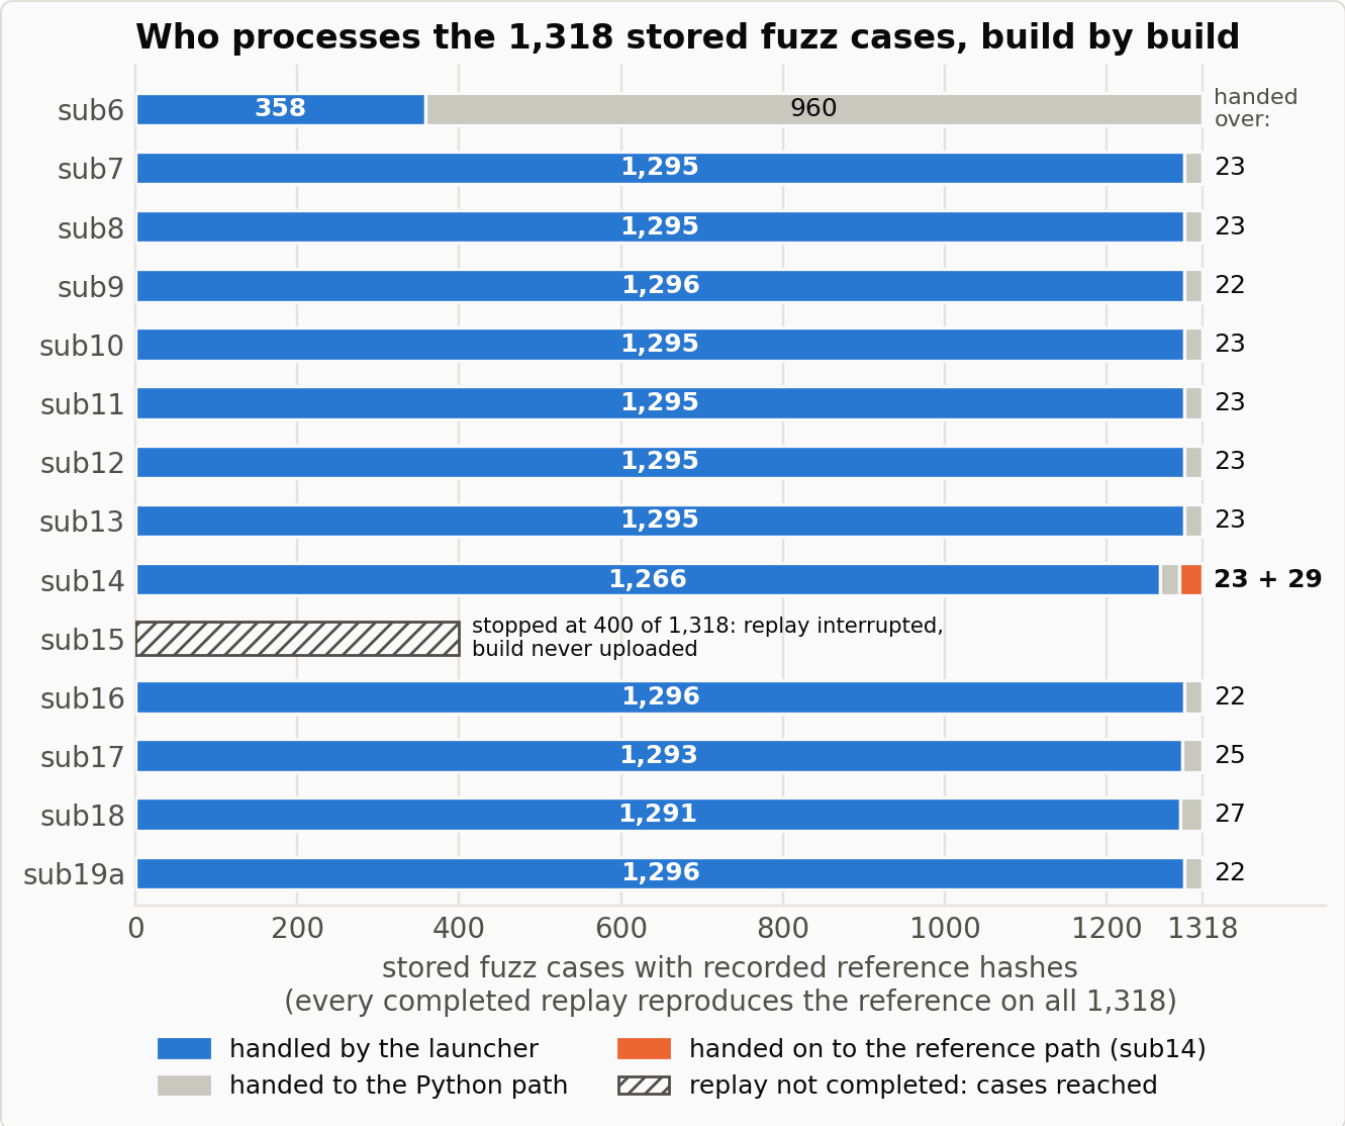


Figure 18. The stored fuzz corpus by the layer that processed each case, for every build replayed in its full image: before the fix (sub6), after it (sub7), and up to sub19a. Every completed replay reproduces the recorded reference hashes on all 1,318 cases. The launcher hands 22 to 27 cases to the Python path (22 on sub9, sub16 and sub19a, 23 on sub7, sub8 and sub10 to sub13, 25 on sub17, 27 on sub18; §5.8); on sub14 a further 29 went on to the reference path. One replay was not completed: sub15 stopped at 400 cases. sub16's bar is from a replay repeated after its first one stopped at 200.

6.5 Is the fixed cost ours? Four parallel studies

Study	Main result	How we used it
Competition intelligence	The leading team's public image is a 1.2 MB single-layer image; several other top teams ship the same shape; Development scores only the 71 public units	Built and uploaded the same shape (sub7 scratch)
Container start-up engineering	Published warm `docker run` ≈ 0.55 s regardless of image size; the GPU runtime hook rescans the image's library directories (estimated 5–30 ms for a Python image)	Predicted a small gain; checked that our threads are never throttled by the CPU quota (they are not: `nr_throttled = 0`)
Literature	numpy's scalar `log` on AVX-512 hosts goes through a vector library and can differ from the C library by about 1 ulp	Supports the 16-ulp margin of our guard (§7.3); not a measurement
Code review	About 430 MB touched to write 22 MB; a `\u`-escape hole in the JSON parser; several crash-instead-of-fallback paths	sub8, sub9; the parser now decodes escapes as Python does

The upload scored **+1.9%**, in one bundled pair that also changed the output encoding and the binary, and within the reported noise (§4.2). It did not show image shape to be worth much; it does not show that it is worth nothing, and the full image's host cost was never measured.

6.6 A fix that would have broken six units

The review correctly pointed out that our parser kept `\uXXXX` escapes verbatim, so an escaped key could be silently misread. Our first fix refused such input. The page-fault survey that ran next reported only 59 of 65 units: six public scenarios contain such escapes in their free-text description, and in an image without the Python layer they would have failed outright. The escapes are now decoded to UTF-8 (surrogate pairs included; lone surrogates are declined).

6.7 Two reviews

Both were read-only: no builds, no changes to sources, no uploads. Their numbers are estimates from reading code and our measurement files.

Review	Main results	How we used it
"Find a way to 240,000"	The ledger rule of §5.9, with the lines of the scorer that implement it; the two parameters of our score model cannot be separated from three scores; nothing in the image configuration can shorten the GPU hook or the container lifecycle	sub10, worth +2.9%

Review	Main results	How we used it
A deliberately harsh critique	The bound on the fixed cost (§5.6); a total upload cap, which it gave as 20; the laptop had been contradicted by the host; per-run overheads in our writer; its probabilities by the deadline were about 50% for 200,000, 18% for 210,000, 6% for 220,000 and 1–2% for 240,000	The bound was verified and adopted. The cap is real but is 23, as the competition page shows (§8). Its overhead fixes went into sub13, which scored lower. 200,000 was passed two days later

6.8 Three studies, three decision rounds and the organizers' statements

The three studies were read-only, like those of §6.7.

Study	Main results	How we used it
Score model	No model built on laptop process time ranks our own builds (§5.6)	We stopped projecting scores from laptop time, after three projections had missed
Public code of other teams	None from the leading teams. Two public engines by other teams, both with 4-ary heaps, static binaries and scratch images. The notes of one say that numpy 1.26's `log` on AVX-512 processors is a vendor vector library and differs from the C library on about 27% of inputs. The platform's container flags, from the toolkit's runtime document. The output folder is a bind mount of a host directory	Our design choices are the common ones. The `log` note bears on §7.3
Engine review (nothing compiled)	Nine candidate changes, ranked, with estimated gains; order receipts are 37.6% of the largest unit's events and 47.7% of the deep-book unit's	Five went into sub18: wakeup rings (its estimate: 7–9% of simulation-thread time), own orders only for market makers (about 3%), one-row trace buckets (3–4%), no record for a skipped ledger (part of 4–6%), blocked queues as sorted vectors (0.6% on the largest unit, 6–7% on the deep-book unit). Not implemented: a bottom-up heap pop, noise-trader draws on the helper thread, prefetching, and handling order receipts outside the event queue (its estimate: 20–28% more, 12–20 hours of work, high risk)

The review's estimates were not checked one by one. What was measured for the five changes together, plus the compact trace row, is in §5.11: 7.4% fewer instructions and 733 against 830–850 million cycles on the largest unit, one thread.

Decision round	State	Answers	What happened
6	Before sub17 was uploaded	Value of uploading sub17 with writer threads first 2.07, the engine change alone first 1.64, waiting for per-unit data 1.01, the helper disabled 0.50; as a choice: engine change alone first 0.44, wait 0.41. Reachable: 200,000 0.67, 210,000 0.44, 230,000 0.18. Next work: the event queue 0.67	Both sub17 variants were uploaded five minutes apart. The event-queue work became sub18

Decision round	State	Answers	What happened
7	Both sub17 variants uploaded; the score of the one without writer threads not yet in	Upload sub18 when validated, then start the high-risk restructuring 0.74; attempt the restructuring 0.34; sub18 beats sub16 0.80; reachable: 220,000 0.55, 230,000 0.24; candidate for the Final: the best-scoring build 0.69	sub18 was uploaded only with the helper off (193,962), so "sub18 beats sub16" was not tested as posed. The restructuring was not attempted
8	Final build validated; full image or scratch image for the Final	Full image 0.97, scratch image as scored 0.01, new scratch image of the fixed binary 0.02; at least one sealed scenario handed over 0.56; full image more than 1% below scratch 0.36, more than 3% below 0.23	The full image was uploaded and finished with no problems listed (§5.12). Whether a sealed scenario was handed over, and what the full image cost, are not known

Statements by the organizers that we found in their public issue tracker, beyond those used in §4.2 and §5.9: submissions should keep accepting the GPU device the unit attaches and not set `NVIDIA_VISIBLE_DEVICES` in the image (we never set it); the Final limits are 300 s per run, five runs per unit (a warm-up and four counted), 4 CPUs, 16 GiB and 24 hours for the whole run; the Final rehearsal was postponed; an upload that reads "Submitting" for well over an hour is usually held for a team-claim problem and still consumes an attempt (one of ours read "Submitting" for a while after a later upload had finished, then finished normally). The calibration the organizers had announced has since been published (§5.12). Two later commits to their repository changed documentation only: images must be anonymously pullable, and the Final takes one upload per team at any time in a window of about two weeks after Development closes, during which the code may still change; a Final upload that ends as failed does not use the attempt.

---

7. Experiments, hypotheses and their outcomes

7.1 Selected experiments

Experiment	Result	Decision
Dense price-indexed order book	0.57–1.09×	Reverted
Profile-guided optimisation, first attempt (wall-clock A/B on the shared library)	−9% to +27%	Inconclusive; not adopted then
`-march=x86-64-v3`	+3.7%	Too small
Cold vs warm run in one process	Best-of-N still far from the old target	Dropped when the rule changed
Arrow parallel column encoding	Identical bytes; speed within noise	Kept, harmless

Experiment	Result	Decision
Static link against OpenSSL	Link failure (zstd/zlib dependencies)	Wrote SHA-256 ourselves
Own Parquet writer	4/4, then 65/65 tables identical	Adopted (sub5)
Parallel output chains, no teardown before exit	`gb_mega` 563 → 530 ms	Adopted
Delta encoding	Files 5.6× smaller; about 4% less process time	Adopted (sub6)
Asynchronous pre-faulting	No gain in interleaved A/B (inside noise)	Off by default
Two-thread trace merge	No gain in interleaved A/B (inside noise)	Off by default
Scratch image	+1.9% score	Kept for Development
No zero-fill, partial pre-fault, huge pages	−48% page faults, −13% process time	Adopted (sub8)
Index-based trace output	−34% further page faults	Built (sub9); no gain in its one host score
No ledger on the six units that need none	−11.9% process time on them; +2.9% score	Adopted (sub10)
Profile-guided `-O3` build of the static launcher	−1.9% on six units	Adopted (sub11)
Huge pages and up-front population switched off	About +70% on the largest unit on the laptop; +0.2% score	Shipped off from sub11
One fresh container per run	2–5× slower than warm; spread as large as the mean	Local timing demoted to counting work
Streamed writer, pooled threads, thread cap, allocator settings	−6% on the laptop (inside the spread); −2.6% score	Not built on further
Trace kept in final order during the run	−6.8% on seven units; peak memory −17%; score +7.6% (sub16 against sub11)	Adopted; the basis of every later build
Writer threads during the run	Laptop, unit folders: −14%, +4% and +12% in three comparisons; inputs in memory: −17% process time over 71 units. Host: +1.6% (sub17); below sub16 on sub16's binary (sub16t, last upload)	Kept as a switch, off by default and off in the Final image
Inputs on an in-memory mount for timing	The Windows-backed mount had added 10–20 ms to every run	Adopted for all later timing (`lab/true_p.py`)
Branch-free heap step	Largest unit: instructions −5%, branch misses 11.59 → 4.93–5.12 million, cycles −8 to −17%	Adopted (sub17)
Heap padded with sentinels	Instructions −2.0%; cycles within noise, slightly worse on one unit	Reverted

Experiment	Result	Decision
Helper thread started at engine creation, never abandoned	Not measured locally before upload; sub17 scored 3.6% below sub16	Withdrawn in sub19a; mechanism not established
Latency helper thread off	Laptop: simulation phase of the largest unit 257–298 ms against 211–220 ms. Host: −8.6% (sub16 binary)	Helper stays on
Compact trace row, less bookkeeping, wakeup rings, sorted blocked queues	Largest unit, one thread: instructions −7.4%, cycles 830–850 → 733 million. Host, with the helper off: +4.4% over sub16 (heap step included)	Adopted (sub18)
Helper that sleeps while its ring is full	Slower than spinning with a ring of 2^{13} values; with 2^{15} faster on two units and about equal on a third	In sub18 with a ring of 2^{15}; no host score; not in sub19a
Eight binary and helper combinations timed on a loaded laptop	Two rounds of one binary differed by up to 45%	Discarded

7.2 Hypothesis register (abridged)

Hypothesis	Test	Outcome
A native reimplementation can be bit-exact	65 + 30 + fuzz	**Confirmed on everything tested**
Trace rows arrive in time order, so only equal-time runs need sorting	Identity + a monotonicity check kept in the code	**Confirmed for the public scenarios**; refuted for negative latencies (below)
Page faults are a large share of the loop	Profile, then A/B	**Confirmed**
A dense order book is faster	A/B	**Refuted**
Blocked queues give exactly the reference's dispatch order	Argument, independent derivation, identity	**Confirmed on everything tested**
The Development board still ranks loop speed	Organizer post, README, board	**Refuted** (the rule changed)
The verifier accepts any valid Parquet file with the same table	Scorer source; official harness	**Confirmed for the public harness**
Our gap to the leaders is mostly our own process time	Phase timing; then the sub5 score	**Partly confirmed**: it closed 36% of the gap
sub5 will score 185–220K	Upload	**Missed, narrowly** (181,496, one upload)
A two-parameter overhead model describes the board	Fit	**Refuted as stated** (ceiling below the leader)

Hypothesis	Test	Outcome
Output size costs container time on the scoring host	sub7 has 5.6× smaller files than sub5	**Not established** (one bundled upload per side, +1.9%, within the reported noise)
Image shape is worth more than 5%	Upload of the scratch image	**Not established** (one bundled upload per side, +1.9%); not supported by that pair
sub6 is slower than sub5	Two further interleaved runs	**Refuted** (the slow run was noise)
Memory handling dominates the remaining process time	Resource counters; then the sub9 score	**Confirmed on the laptop**; on the host **not established** (one upload per side, −0.8%, within the reported noise)
The scorer does not need a ledger where the card says so	Scorer source; README; the sub10 score	**Confirmed** from the scorer and README; the +2.9% score step is not established (one upload per side)
Huge pages and up-front population cost, or save, time on the host	sub11 with both switched off	**Not established** (one upload per side, +0.2%, bundled with a compiler change)
Warm best-of-N timing predicts the direction of a host score	Nine steps (§5.9, §5.10)	**Not supported**: opposite signs in four of nine, among them the memory work of sub9, sub13 and sub17; the host side of most steps is one upload per side within the reported noise
The fixed container cost is about 0.55 s	The leader's score	**Refuted**: at most 0.47 s if the fixed cost is equal on every unit (for the organizers' higher calibration figure, see §5.12)
Removing per-run overheads (thread creation, allocation churn) raises the score	sub13	**Not established** (one upload per side, −2.6%, within the reported noise)
A streaming writer loses on the host (our reading of sub13)	sub17 with and without writer threads during the run	**Not established** (one upload per side): +1.6% with them on sub17, below sub16 with them on sub16's binary. sub13 remains unexplained
Trace rows always arrive in time order	Fuzz replay of sub14	**Refuted** for negative latencies (29 stored cases); exact handling restored in sub15
Building the trace in order during the run raises the score	sub16 against sub11	**Supported** (+7.6%, one upload per side), with two smaller changes in the same step
The latency helper thread costs more on the host than it saves (held at 60 to 40)	The sub16 binary with the helper off	**Not established** (one upload per side, within the reported noise): 185,818 against 203,394, the opposite of what we expected
"Adding or strengthening a thread loses; removing threads wins"	The same upload; sub17 with writer threads on	**Not established** (one upload per side, within the reported noise); the two uploads went against it

Hypothesis	Test	Outcome
Writer threads during the run lose on the host	sub17 with them (199,285) and without (196,165); sub16's binary with them (sub16t)	**Not established** (one upload per side, within the reported noise): +1.6% on sub17, against what we had announced from the first of the two scores; below sub16 on sub16's binary
A helper started at engine creation is at least as good as one woken at the start of the run	sub17 against sub16, with the two helper-off uploads to exclude the engine	**Not established** (one upload per side, within the reported noise): sub17 scored 3.6% lower, and sub19a, with the old start-up restored under sub18's engine, also scored below sub16 (−2.1%)
sub17's helper was not working at all on the host	sub18 with the helper off	**Not established**: the upload compared engines only, one upload per side
sub18's engine is faster on the host than sub16's	Both with the helper off	**Not established** (one upload per side, +4.4%, within the reported noise); not tested with the helper on
sub17 will score 197–205K; later 205–209K without writer threads and 209–219K with them	Uploads	**Missed**: 196,165 and 199,285 (single uploads)
A model "fixed cost + k × laptop process time" can rank our builds	Fit to six scores	**Refuted** (rms residual 3.2%, largest 6.3%)
Development scores carry noise of about 1.6%	Organizers' statement; one team's report of 0.1%; another team's identical images up to 14% apart	**Unsettled**: the reports point both ways (§4.2); not verified by a repeated upload of ours
240,000 is reachable for us	Model; the decision model put it at 0.31 and 230,000 at 0.18 and 0.24; an independent review put 240,000 at 1–2%; from sub16's score 230,000 needs 41–68% less process time on the host	**Not reached** in Development (best 203,394); the Final metric is on a different scale
The full image costs little against the scratch image in the Final	Decision round 8 (judgments only)	**Not tested**: no upload compared the two

7.3 The `log` problem

A log-normal latency model needs μ = log(mean). The reference computes it with numpy. numpy's scalar `log` may be a vectorised routine on AVX-512 hardware, differing from the C library in the last bits. Rather than embed code we could not test, the launcher computes μ with the C library and flags any draw whose rounded result could change if μ moved by 16 ulps; a flagged run is handed to the Python layer, which uses numpy on the same host. The flag fired on 0 of 71 public units and on 4 of 1,318 fuzz cases in a launcher-only pass; with the helper thread drawing ahead it can also fire for a draw the run never uses (§5.8). The 16-

ulp margin is an assumption supported by documentation (differences of about 1 ulp), not by a run on such hardware. Another team's public notes state that on AVX-512 processors numpy 1.26's `log` differs from the C library on about 27% of inputs; we have not reproduced that figure. What we can say is that every one of our scored Development runs passed the correctness gates on the host, on units none of which raises the flag, and that the Final run's summary listed no problems; in the Final image a flagged run is handed to the Python layer (§5.12).

---

8. What went wrong

We record these because they shaped the result as much as the successes.

- **We optimised the wrong component for days.** After the rule change we shipped sub4 without profiling the whole process. Our own notes already said that encoding dominated small units.
- **We read the timing harness late.** The launch command and the fact that every unit attaches a GPU were in the public repository; we inferred the fixed cost by curve fitting first.
- **Three early predictions missed.** sub5 scored just under our predicted range; the fitted ceiling is contradicted by the leader; the scratch image, which we rated the main hope, scored 1.9% higher in one bundled pair within the reported noise.
- **The decision model was sometimes wrong.** It answered that small units drive the mean (the arithmetic says large ones do) and it preferred the upload that produced 1.9%. It was right that shipping and reading the result beat further speculation.
- **The fuzz re-check was deferred across three submissions.** When finally run it passed, and exposed the 73% decline rate.
- **Tooling.** Docker died four times during one reproduction run (memory). Patches sent through shell here-documents silently turned `\n` in string literals into line breaks, five times. One benchmark measured a stale image because a build failure was hidden behind a pipe. A file size was once written into a draft from memory and was wrong.
- **We optimised against the wrong measurement for three days.** Warm repeated runs on a laptop were treated as a proxy for a host that runs each unit once, cold. The host contradicted the proxy twice before we tested the proxy itself (§5.9).
- **We missed a rule that the README states.** Six heavy units need no message ledger. A read-only review found it; its upload scored more than the two preceding days of memory work, though both steps are single uploads within the reported noise.
- **We planned with the wrong upload budget, twice.** First with none; then with a total of 20 read from a toolkit document, where the competition page allows 23 per person. That was corrected. One upload (sub11) bundled a compiler change with a memory-mode change and so answered neither question cleanly.
- **We uploaded sub13 without timing it against its predecessor**, on the same day we had resolved to bundle fewer changes. It scored 2.6% lower and we cannot say why.
- **We dropped a slow path we believed unused.** The comment in our own code said out-of-order trace rows had never been observed; the fuzz corpus contains 29 cases of it. The full image hid the failure behind its fallback.

- **We shipped a speculative change inside a measured one.** sub17's new helper start-up was added "as a safeguard" with no evidence from the host, together with a heap change whose counters we had. The build scored 3.6% below sub16, and two further uploads did not establish a cause (§5.10). The bundle, not the noise, is what made it unexplainable: even a repeated upload could not have said which change mattered.
- **We gave three score projections from laptop timing, all wrong,** after the model behind them had already been shown not to fit. The team planned around numbers that meant nothing.
- **We announced "writer threads lose" from one score** whose comparison score had not arrived. It was corrected an hour later, by the opposite result.
- **We read a rule out of nine scores ("threads lose"), dismissed the one counterexample, and bet an upload on it** at 60 to 40. The helper-off upload scored 185,818. It turned out to be the cleanest single-setting comparison of the project, which was not why it was made, and it is still one upload per side.
- **Our laptop figures had included a slow input mount since sub4.** We had never traced a run. Every earlier comparison carried 10–20 ms per run of it (§5.11).
- **We never obtained per-unit results from the host.** They need the team's login on the platform; this was asked for several times and not done. The fixed cost per container is therefore still unknown.
- **Process slips.** Two validations once ran at once on one log; a finished log of a previous image was once read as a new build's result; the first per-thread profile attributed the helper's samples to the wrong thread. Each was caught and redone; the lab record lists them.
- **The full image of our best build had a last-resort path that crashed under the runtime restrictions**, and its hand-over decision could depend on thread timing. Both were found only while preparing the Final, by forcing paths that no public unit takes (§5.12). The scratch images that were scored could not reach the first defect; they had no fallback at all.
- **A second independent review**, asked to be harsh, called the engineering "three days of optimisation against a proxy that the scoring host had already contradicted". We agree.
- **An independent review rated the work** 7.5/10 for correctness engineering, 5.5/10 for whole-process performance and 5/10 for measurement discipline. We think that is fair.

---

9. Limitations

Correctness

- sub5 and later are **not byte-identical** to the reference Parquet files. They read back as identical tables and pass the public verifier. A sealed check comparing bytes or hashes with the reference would reject every unit. We found no such check in anything published; the Final scorer is not public.
- The files were read only with pyarrow 15.0.2 and pandas 1.5.3.
- Writer paths never exercised by our data: dictionaries above 16 entries, an empty ledger, an all-null column, 64-bit-wide delta blocks.
- Exactness is established on the public scenarios and the fuzz corpus. Sealed scenarios may combine features differently.

- The `log` margin (§7.3) is unverified by any test of ours on AVX-512 hardware; the Final host is such a machine. By the organizers' statement it is also the Development host, where every one of our scored runs passed, on units that do not raise the flag.
- The scored Development images were scratch images with no fallback layer: a unit the launcher declines fails and scores zero. This was safe for Development (all 71 public units are handled in every run made). For the Final we chose the full image with the exact Python fallback (§5.12); whether any sealed scenario needed the fallback is not known.
- **The fuzz replay of the best-scoring image, sub16, is not part of its validation log**: there it stopped at 200 of 1,318 on a Docker failure. A separate replay on the same image before its upload completed with 1,318 of 1,318, 1,296 in the launcher and 22 handed to the Python path (`lab/bench/val_sub16/fuzz.log`, `lab/bench/fuzz_sub16_complete.log`); that the image tag had not changed in between rests on the image's creation time, not on a recorded digest.
- The fix for the look-ahead effect is in the Final image only. The variant of it in the deposited sub18-based engine source (§10.2) is in no image and has not been fuzz-replayed.
- The Final's run summary listed no problems, but it shows no unit count and no per-unit outcomes. That no sealed unit failed is a reading of that summary, not a unit-by-unit result, and the organizers' verification is pending.
- We never ran the scratch image on a host with a GPU runtime before uploading; it worked.

Performance

- No measurement on the scoring host other than its scores, and none on any native Linux machine. Absolute times are from Docker Desktop on a swapping laptop, and until late in the work they included a slow input mount (§5.11). Ratios of laptop timings proved unreliable wherever memory or threads were involved, and differ between sessions; only counts and host scores are firm.
- Every Development score is a single run. That the host is dedicated and repeatable to about 0.1% rests on the organizers' statement and on one team's report; another team reported identical images up to 14% apart (§4.2). Our own only repeated upload (sub4) differed by 1.6%, and we have not repeated one since. Each comparison in §5.5 and §5.10 is one run against one run, and those of a few percent are not established.
- The full image's timing on the host was never measured separately: no Development uploads were left when it was chosen. Its only host timing is the Final score, which is on a different scale from the scratch images' Development scores, so what the choice cost, if anything, is unknown.
- The platform withholds program logs and we did not obtain per-unit results, so we cannot say which units cost us most, and the fixed cost per container is unknown beyond the bound $c \leq 0.47$ s.
- There is no score model. The one of §5.6 is wrong, and no replacement built on laptop time fits (§5.6).
- The step from sub11 to sub16 is not strictly one change: besides the trace assembly it carries regrouped agent fields and allocator settings. sub11's own score bundles two changes and cannot be attributed.
- That sub17's lower score is due to its helper start-up was an inference by elimination from two other single uploads; it is not established, and neither is the drop itself. sub19a, meant to test it directly, also scored below sub16, one upload.
- sub18 was scored only with the helper off. Its helper, which sleeps while its ring is full, has no host score. The only scored build that combines sub18's engine with a working helper is sub19a, which uses sub16's helper code.

- The value of the helper thread (9.5%) and of writer threads (1.6%, and below sub16 on sub16's binary) rests on single pairs of uploads on the 71 public units of the Development roster and is not established.
- Hardware counters were taken on one thread on a laptop processor. They say nothing about how threads are placed or share a core, which is where the host surprised us most.
- Wall-clock effects below about 5% are unresolved on our rig (asynchronous pre-fault, two-thread merge, the first profile-guided attempt).
- sub14 and sub15 were never uploaded, and sub15's full validation was never completed.
- sub13's lower score is unexplained. It bundled five changes.
- The number of fuzz cases the launcher hands to the Python path was 22 on sub9, sub16 and sub19a, 23 on sub7, sub8 and sub10 to sub14 (on sub14 a further 29 went on to the reference path), 25 on sub17 and 27 on sub18. The outputs are correct in every case. The explanation given in §5.8 for the last two has not been confirmed by a targeted test, and the single case on sub9 has not been traced.
- A negative latency is handled exactly from sub15, on the evidence of 29 fuzz cases compared with an earlier build. No public unit has one.
- The organizers' calibration gives create-to-remove times for a minimal static image of 0.630–0.643 s, above the bound of 0.471 s that the leader's Development score implies (§5.6); the likely explanation and its limits are in §5.12. The fixed cost on the Development board remains unknown.

Scope

- This is mainly a Development-phase report. The Final has run: one upload (§5.12), timed on sealed and public units, five runs per unit, from container start to finish. Its score is not comparable with any Development figure here, its rank is unknown until the organizers publish the Final results, and their verification is pending. All 23 of our Development uploads were used.

---

10. Reproducibility

10.1 What is exactly reproducible

Quantity	Reproducible?
Table contents of both output files; event and message counts	Exactly
Output bytes, sub1–sub4 and Python layers	Exactly (with the `log` caveat on AVX-512 hosts)
Output bytes, sub5 onward	Exactly between runs of the same image (65/65 units, 3 runs); different from the reference by design
Verdicts of the identity checks and of the official harness	Exactly
Instructions per run on one thread (`perf stat` , user mode)	To ±0.00% on our machine; branch misses to under 0.5%, cycles to 0.5–2%

Quantity	Reproducible?
Instructions per event	Closely
Times, events/s, scores	Machine- and host-dependent
Image digest after a rebuild	No

10.2 Published images

Image	Tag	Digest	Score (Development unless stated)
Baseline (unmodified ABIDES)	`dev`	`sha256:c4f8a635794ebeb4026e8bc2977b3fdd9feef830def78025ce4f744461c77996`	
sub1		`sha256:8d4db7f43ea848770c7d99a6b0b14089b3b5ee72d88a95fdf8208414e030fe7b`	old rule
sub2		`sha256:81e6fa40372a3a4e076a3a5e0adc0341b8c0263c288e8d3a5fe3dae32acc2d7a`	old rule
sub3	`native-v3`	`sha256:67e3086d427a68a9ba1c390811dafbc93f11b6ed42d228d5312c1a91c0fc60c7`	never uploaded
sub4	`native-v4`	`sha256:697ae5de6d95b1fce2bd467375060a10f4f343a04a00d00a989b38e5869d85c7`	153,825
sub5	`native-v5`	`sha256:eb90d781431939ce0357290851f4b08f178dfd654d5de2e53feaefa4f117ab06`	181,496
sub7 (scratch)	`native-v7s`	`sha256:2b97366d097cf6a68e6aefb3a148940ae1517de55c6945d7dc43f64e6b3e4cf0`	184,858
sub9 (scratch)	`native-v9s`	`sha256:9e8206c3567c1f54e43f74a28a302a06971d8de99ed704b7e6bdb1ace61d3a57`	183,420
sub10 (scratch)	`native-v10s`	`sha256:3b27783ef58421aba303d1897564e7b59df06f86d89e70e982d2c5b34254a441`	188,687
sub11 (scratch, memory switches off)	`native-v11m`	`sha256:47c37844beb88e6a36043a9ef25bf7ad248ec41ae299fc8f8472136d7cfe8128`	189,018
sub13 (scratch, memory switches off)	`native-v13m`	`sha256:1ca74d1cd2c8dbc63cd2db495b9d1fc5885e3206f8aa43c87bac5db3784f86f0`	184,047
sub16 (scratch, memory switches off)	`native-v16m`	`sha256:96856191063e0cefe726d5c9a0d8bbea049ef52182e6a3308fe174aadfcdbd83`	**203,394**

Image	Tag	Digest	Score (Development unless stated)
sub17 (scratch, writer threads off)	`native-v17n`	`sha256:6d1a0d8fdfce8001fe4d7722009bfa9e7b54f15b458ff68bdb86a1290e03c192`	196,165
sub17 (scratch, writer threads on)	`native-v17t`	`sha256:998c2f45c2eac81bb50c14679694a1ca090e43534d0c6bbce9f8b208bb81ecd8`	199,285
sub16 binary, helper thread off	`native-v16-helper-off`	`sha256:31cb73d3789e38dba5f47f6c6e91068ecd216f45656fa1dd4fc405bbf8788f5c`	185,818
sub18 binary, helper thread off	`native-v18-helper-off`	`sha256:b437b60816126789b60d9faa5c0c0a16b0fdd7d7e851d5b4711140ff5feaf6ce`	193,962
sub18 binary, sleeping helper on	`native-v18-helper-sleeping`	`sha256:2f9c4d39a04390cb7700dfc8730746efabe3cf9bbbe64c26846235fcfae38ea7`	never uploaded
sub19a (scratch)	`native-v19a`	`sha256:abca67f17b3558eedca6e44ec2e437ec5b9ff7ccb3121c4ad2c4879f53dcf434`	199,058
sub16t (scratch, sub16 binary, writer threads on)	`native-v16t`	`sha256:b0478b41338580ff4cd4285551ce0b3dcaff1a96e974bf391d739d9403f32602`	below sub16, exact score not recorded
Final: sub16 with two fixes, full image (773 MB)	`native-final`	`sha256:44f825eb7b8a5e0276baea84aafe3c344bdbb927500dac2a6ac0782e05e93487`	Final metric: 1,755,232.6496 (upload 993712; not comparable)

All under `docker.io/slashalpha/agenthon-track3`. sub6, sub8, sub12, sub14 and sub15 were built and tested locally and never pushed; sub19b existed only as sources and a local full image at the time of writing. Sources are kept as snapshots (`lab/sub6_src/` , `lab/bench/*_sub8.*` , `*_sub11.*` , `*_sub13.*` , `*_sub14.*` , `*_sub15.*` , `engine_sub17.cpp` , `engine_sub18.cpp` , `engine_sub19a.cpp` , `engine_sub19b.cpp` , `launcher_sub17.cpp` , `launcher_sub18.cpp`). The scratch images contain the launcher alone; each was built from a full image of the same number whose binary is byte-identical. The two helper-off images add one environment setting to a scratch image without adding a layer (`lab/bench/Dockerfile.nohelper`). The engine source in the deposit is sub18's plus a variant of the look-ahead fix (§5.8, §5.12) that is in no image.

The Final image's engine is `lab/bench/engine_final.cpp`, sub16's engine with the fix of §5.12; the image must stay pullable at its digest until the Final results are published.

10.3 Commands

```
# correctness of a byte-identical image (sub1-sub4): baseline, candidate, hash comparison, batch, harness
IMAGE=slashalpha/agenthon-track3@sha256:697ae5de… bash repro/repro.sh all

# full validation of a table-identical image (sub5 onward):
# tables (65), repeat-run bytes, batch under runtime restrictions, official regression, fuzz corpus
bash lab/validate_image.sh <local tag>

# replay of the 1,318 stored fuzz cases against recorded reference hashes
docker run --rm -v "$PWD/native/fuzz:/fz:ro" <image> python /fz/recheck_stored.py /fz

# fast checks before the long validation: tables, no-ledger units, byte stability, negative-latency cases
bash lab/quick_checks.sh <local tag>

# the six units that need no message ledger, mounted the way the harness mounts a unit
bash lab/check_skip.sh <local tag>

# warm measurements of several builds on the 65 units (time, page faults, peak memory, output size)
bash lab/measure_builds.sh 2 3 sub9 sub10 sub11:off sub13:off sub14:off sub15:off

# one fresh container per run, as the scoring host runs a unit
bash lab/cold_runs.sh <local tag> 4 t3-mr-deep-book-state-size

# --- later tools; these run inside the development container (image t3-native-perf,
# --- with perf, and the native sources, unit folders and lab tools mounted at /native, /units, /lab)

# the image's profile-guided launcher build, without building an image
bash /lab/build_pgo_dev.sh <output binary>

# byte comparison of two launcher binaries on the 65 single units; optional settings for the new one
bash /lab/cmp_bins.sh <reference binary> <new binary> T3_LAT_THREAD=0

# table comparison of two binaries on all 71 units, for use when the writer mode differs
python /lab/cmp_tables.py <reference binary> <new binary> T3_TRAIL=1

# process time per unit with the inputs copied to an in-memory mount first
python /lab/true_p.py <binary> <out.json> 5 T3_TRAIL=0

# counters on one thread
T3_LAT_THREAD=0 T3_TRAIL=0 perf stat -e cycles:u,instructions:u,branch-misses:u \
    <binary> simulate --config <scenario.json> --out <dir>/trace.parquet

# --- on the host
# build the full image and run the whole validation; build one from an engine snapshot;
# run only the two long stages (official regression, fuzz replay) of a validation
bash lab/build_validate.sh <tag>
bash lab/build_variant.sh <tag> lab/bench/engine_sub19a.cpp
bash lab/validate_rest.sh <tag>

# figures of this report
python paper/make_figures.py
```

`docs/REPORT.md` in the same deposit is the full laboratory record (every experiment, including failed attempts, with exact numbers and file locations); this report is its summary.

10.4 Environment

Windows 11 Home; AMD Ryzen 5 5500U (SHA instructions, no AVX-512); 5.99 GB RAM; Docker Desktop 29.7.2 on WSL2 (kernel 6.6.87.2), VM memory 2.76 GiB. Images: `python:3.11-slim`, numpy 1.26.4, pandas 1.5.3, pyarrow 15.0.2; g++ 14; flags `-O2 -std=c++17 -ffp-contract=off -pthread` (`-static` for the launcher from sub5; `-O3` with profile feedback for the launcher from sub11). Organizer sources: `track3-simulation-public` at `4cc7882` and `bffb572`; toolkit tags v2.3.1 and v2.5.1. The organizers' repository had two later commits when this was written, both to documentation (§6.8).

---

11. Discussion

What the rule change did. A benchmark that divides by a self-reported inner-loop time rewards the inner loop and nothing else; it also rewards choosing what to call the inner loop. Dividing by whole-container time removes that freedom and rewards the complete program, but it also puts a constant into every denominator: at most 0.47 s per unit by the bound of §5.6 if it is equal on every unit (§5.12 discusses the organizers' higher figure), and we cannot say how much less. For the many small units that constant is most of the measured time whatever its exact value. The ranking among submissions whose process time is already small is then decided by a modest part of the denominator. Whether run-to-run variation also matters depends on the host: we saw 1.6% between two identical uploads early on, and the organizers and another team have since described a dedicated machine repeatable to about 0.1%. If that held, differences of one or two percent between uploads would be real, and the limit on what a team can learn would be the number of uploads, 23 in our case. A third team's identical images up to 14% apart say it may not hold, and then no single upload in this report resolves a difference of a few percent. The Final answers part of this by design: it times each unit five times and leaves the container's creation and removal out of the window.

What the measurements taught. In order of discovery: a laptop proxy that differed from the host in size and, in four of nine steps, in sign; a fitted cost model that the leader's score refuted and whose successors could not rank our own builds; and the principle that an upload changing one setting is an experiment and anything else is not. The principle is sound, but one upload per side is not enough when identical images can score 14% apart. Our five single-setting uploads, about a fifth of our budget, gave the helper thread 9.5% ahead, the engine work of sub17 and sub18 4.4% ahead at an equal helper setting, writer threads 1.6% ahead where we had said they lose (and behind on sub16's binary in the last upload), and a change nobody had measured 3.6% behind. None is established; with a repeat of each, they would have been the most informative part of the record. They did show how quickly we generalise from too little. Two of those results reversed statements we had made within hours, one from a single score and one from a pattern in nine. The uncomfortable part is that the discipline was already written down: we had already resolved to bundle fewer changes per upload, and sub17 still shipped a measured change together with an unmeasured one.

What we would do differently. Profile the ranked quantity end to end before touching anything; read the measuring code and the scorer first, including what the scorer does not read; trace one run on the measuring machine before trusting its clock; use counters for engine work and uploads for everything involving threads, memory or the container; make every upload differ from a scored one in a single setting, and repeat each side, with the pairs planned against the upload budget from the first day; say nothing

about a score until its comparison score has arrived; obtain per-unit results; and run the cheap, boring validation (the fuzz replay, and the count of who handled each case) before the interesting optimisation.

What transfers. Four things seem general. A bit-exact port of a Python simulator is feasible if exactness is treated as a gate with layered fallbacks rather than as a property to be hoped for. Serialization can dominate simulation by an order of magnitude once the simulator is native, and after that the order in which results are produced can matter more than how fast they are encoded: building the trace in its final order scored more than every encoder change after the first (one upload per side). Counts (page faults, instructions, branch misses, bytes written) are repeatable on a noisy machine where wall-clock time is not, but they are only as good as the cost model behind them: we cut page faults by two thirds and saw no gain in the one host score that followed. And how a program's threads are started and placed on the measuring machine may matter as much as the engine work; our single uploads pointed that way, but could not show it, and our own machine could not show it at all.

---

12. Related work and sources

These sources were found by literature and web searches during the study and are listed for context.

- Byrd, Hybinette, Balch. *ABIDES: Towards High-Fidelity Multi-Agent Market Simulation* (the simulator reproduced here), and the `abides-jpmc-public` repository.
- Frey et al. *JAX-LOB: A GPU-Accelerated Limit Order Book Simulator*, arXiv:2308.13289 — speed through batching across books, which exact dispatch order rules out.
- Belcak, Calliess, Zohren. *Fast Agent-Based Simulation Framework … (MAXE)*, arXiv:2008.07871.
- Larkin, Sen, Tarjan. *A Back-to-Basics Empirical Study of Priority Queues*, arXiv:1403.0252 — implicit d-ary heaps at small queue sizes.
- Lemire, Boytsov. *Decoding billions of integers per second through vectorization*, arXiv:1209.2137 — bit-packing kernels.
- Apache Parquet format specification, *Encodings* (DELTA_BINARY_PACKED, RLE/bit-packed hybrid).
- numpy issues #22904 and #23523 on `log` / `exp` differences between AVX-512 and other builds.
- Oakes et al. *SOCK: Rapid Task Provisioning with Serverless-Optimized Containers*, USENIX ATC 2018, and later container start-up measurements.
- Agenthon 2026 organizers. `track3-simulation-public` (rules, harness, scenarios) and `Agenthon2026-public` (toolkit), including the scoring-change announcement.

Statement on the use of AI tools

AI tools were used in this work, including for running the experiments, analysing the results and producing the figures. Numbers come from runs recorded in the accompanying laboratory record, except where a source is named: the organizers' statements and calibration, other teams' reports, and the decision model's

probabilities, which are judgments. One result has no number: the score of sub16t, the last Development upload, was not recorded. Statements that are modelled, estimated or unverified are marked as such. The author takes responsibility for the content.

Data and code availability

The deposit contains this report, its figures and the script that generates them, the full laboratory record (`docs/REPORT.md`), the reproduction kit (`repro/`), the validation and benchmark tools, the fuzz corpus with recorded reference hashes, and the measurement files under `lab/bench/` . The submission images are public at the digests in §10.2.